



# Test Report

Report No.:XNO250428620AX2-1

Date:Apr 30, 2025

Page 1 of 4

Applicant:

Address:

The following sample(s) and information were submitted and identified by the applicant

Sample Name: Lithium-ion battery  
XNO Report Number: XNO250428620AX2-1  
Model No.: GX 401030  
Manufacturer:  
Manufacturer Address:

Origin Of The Product(s): China  
Sample Received Date: Apr 28, 2025  
Sample Tested Date: Apr 28, 2025 to Apr 30, 2025  
Test Requested: Test as requested by client  
Test Method: Please refer to next page(s)  
Test Results: Please refer to next page(s)

## Summary of test results:

| Test Requested                                                                           | Conclusion  |
|------------------------------------------------------------------------------------------|-------------|
| Annex I of Regulation(EU)2023/1542-Heavy Metals Content in batteries and waste batteries | <b>PASS</b> |



Authorized signature

Kyle Kuang  
Assistant manager

Approved Signatory

**Guangzhou Supreme Technology & Testing Service Co., Ltd.**

**Note:** This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. Any demurral to the content of test report, please propose in 15 days after the report's sending out, it will not be accepted after this date.

**Guangzhou Supreme Technology & Testing Service Co., Ltd.**

103, NanSha IT Park, South Tower, No.2 Huanshi Dadao Nan, NanSha District, GuangZhou City, Guangdong Province, China

Tel: 020-39004143

Fax: 020-39390517

Email: service@xnotesting.com

Website: <http://www.xnotesting.com>



# Test Report

Report No.:XNO250428620AX2-1

Date:Apr 30, 2025

Page 2 of 4

## Test Result(s):

### Annex I of Regulation(EU)2023/1542-Heavy Metals Content in batteries and waste batteries

Test Method: IEC 62321-4:2013+A1:2017 & IEC 62321-5:2013, analyzed by ICP-OES.

| <u>Test Item(s)</u> | <u>Limit</u> | <u>Unit</u> | <u>MDL</u> | <u>Result</u> |
|---------------------|--------------|-------------|------------|---------------|
|                     |              |             |            | No.1          |
| Lead(Pb)            | 0.01         | %           | 0.0002     | N.D.          |
| Cadmium(Cd)         | 0.002        | %           | 0.0002     | N.D.          |
| Mercury(Hg)         | 0.0005       | %           | 0.0002     | N.D.          |

## Remarks:

1. % = percentage by weight
2. 0.0001% = 1 mg/kg = 1ppm
3. MDL = Method Detection Limit
4. N.D. = Not Detected (Less than MDL)
5. Batteries accumulators and button cells containing more than 0.002% Cadmium or more than 0.004% Lead shall be marked with the chemical symbol for the metal concerned: Cd, Pb.
6. Batteries, whether or not incorporated into appliances, light means of transport or other vehicles, shall not contain more than 0.0005% of mercury (expressed as mercury metal) by weight.
7. Portable batteries, whether or not incorporated into appliances, light means of transport or other vehicles, shall not contain more than 0.002% of cadmium (expressed as cadmium metal) by weight.
8. According to the EU New Battery Regulation(EU) 2023/1542, portable batteries (non portable zinc-air button cells) containing between 0.004 %-0.01 % lead, shall be marked with the chemical symbol for the metal concerned: Pb.

**Note:** As specified by applicant, to test content in the selected materials of the submitted samples. Pic.1 to Pic.2 are the sample tested. The test results are only responsible for the submitted sample. The test report is only for customer research, teaching, internal quality control, product development and other purposes, for reference only.

**Note:** This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. Any demurral to the content of test report, please propose in 15 days after the report's sending out, it will not be accepted after this date.

### Guangzhou Supreme Technology & Testing Service Co., Ltd.

103, NanSha IT Park, South Tower, No.2 Huanshi Dadao Nan, NanSha District, GuangZhou City, GuangDong Province.China

Tel: 020-39004143

Fax: 020-39390517

Email: service@xnotesting.com

Website: <http://www.xnotesting.com>




# Test Report

Report No.:XNO250428620AX2-1

Date:Apr 30, 2025

Page 3 of 4

## Lead, Cadmium & Mercury Testing Flow Chart

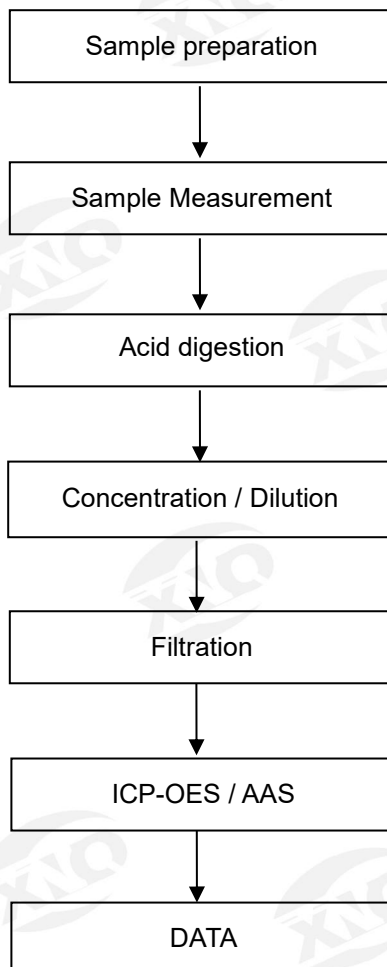

**Note:** This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. Any demurral to the content of test report, please propose in 15 days after the report's sending out, it will not be accepted after this date.

**Guangzhou Supreme Technology & Testing Service Co., Ltd.**

103, NanSha IT Park, South Tower, No.2 Huanshi Dadao Nan, NanSha District, GuangZhou City, GuangDong Province.China

Tel: 020-39004143

Fax: 020-39390517

Email: service@xnotesting.com

Website: <http://www.xnotesting.com>



# Test Report

Report No.:XNO250428620AX2-1


Date:Apr 30, 2025

Page 4 of 4


## Sample Description:

|              |              |               |           |
|--------------|--------------|---------------|-----------|
| Specimen No. | Description  | Material      | Location  |
| 1            | Battery body | Whole battery | GX 401030 |

## Sample Photo:

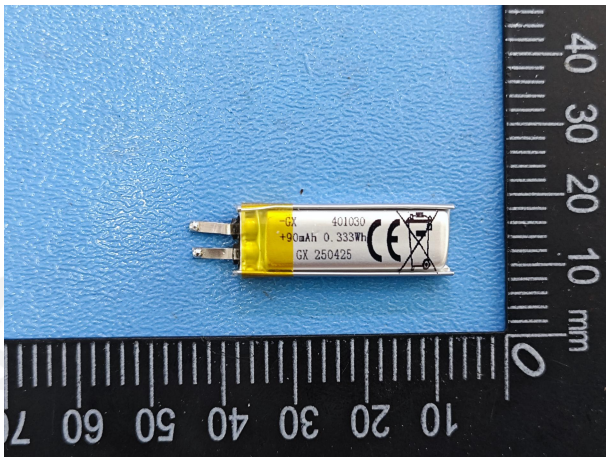

Pic.1

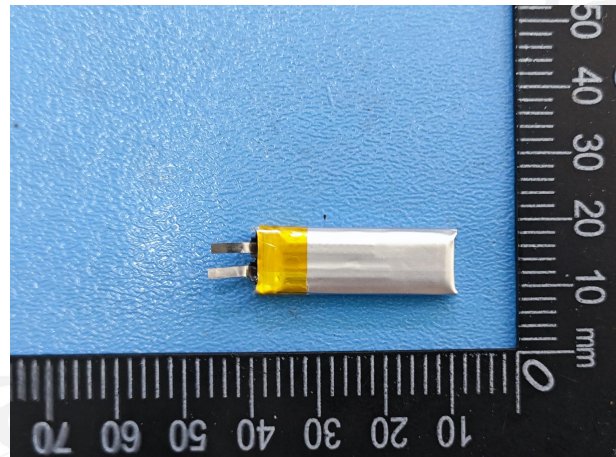

Pic.2

\*\*\* End of Report \*\*\*

**Note:** This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. Any demurral to the content of test report, please propose in 15 days after the report's sending out, it will not be accepted after this date.

**Guangzhou Supreme Technology & Testing Service Co., Ltd.**

103, NanSha IT Park, South Tower, No.2 Huanshi Dadao Nan, NanSha District, GuangZhou City, GuangDong Province, China

Tel: 020-39004143

Fax: 020-39390517

Email: [service@xnotesting.com](mailto:service@xnotesting.com)

Website: <http://www.xnotesting.com>



# IEC 62133-2 TEST REPORT

For  
Li-ion Cell  
Model: GX 401030

Prepared for:

Prepared by: Shenzhen NCT Testing Technology Co., Ltd.  
B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict,  
Bao'an District, Shenzhen, Guangdong, China  
TEL: +86-755-23218380

Report Number: NCT2405026111-1  
Date of Test: 2024-12-15 to 2024-12-25  
Date of Issue: 2024-12-27

Tested By: Dylan Zhu  
Dylan Zhu

Reviewed By: Miya Li  
Miya Li

Approved By: Boris Lin  
Boris Lin



*The results detailed in this test report relate only to the specific sample(s) tested. This report is not to be reproduced except in full, without written approval from NCT Testing Technology.*

|                                                                                                                                                                                                                                                                                                                          |                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>TEST REPORT</b><br><b>IEC 62133-2</b><br><b>Secondary cells and batteries containing alkaline or other non-acid electrolytes –</b><br><b>Safety requirements for portable sealed secondary cells, and for batteries made</b><br><b>from them, for use in portable applications-</b><br><b>Part 2: Lithium systems</b> |                      |
| Report Number.....:                                                                                                                                                                                                                                                                                                      | NCT2405026111-1      |
| Date of issue.....:                                                                                                                                                                                                                                                                                                      | 2024-12-27           |
| Total number of pages.....                                                                                                                                                                                                                                                                                               | 23 pages             |
| Applicant's name.....:                                                                                                                                                                                                                                                                                                   |                      |
| Address.....:                                                                                                                                                                                                                                                                                                            |                      |
| <b>Test specification:</b><br><b>Standard.....:</b> IEC 62133-2:2017+AMD1:2021<br><b>Test procedure.....:</b> Test Report<br><b>Non-standard test method.....:</b> N/A                                                                                                                                                   |                      |
| Test item description.....:                                                                                                                                                                                                                                                                                              | Li-ion Cell          |
| Trade Mark.....:                                                                                                                                                                                                                                                                                                         | N/A                  |
| Manufacturer.....:                                                                                                                                                                                                                                                                                                       | Same as Applicant    |
| Address.....:                                                                                                                                                                                                                                                                                                            | Same as Applicant    |
| Model/Type reference.....:                                                                                                                                                                                                                                                                                               | GX 401030            |
| Ratings.....:                                                                                                                                                                                                                                                                                                            | 3.7V, 90mAh, 0.333Wh |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Testing procedure and testing location:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                         |
| <b>Testing Laboratory:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                         |
| Testing location/ address..... : Shenzhen NCT Testing Technology Co., Ltd.<br>B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                         |
| <b>List of Attachments:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                         |
| Appendix 1: 1 page of Photo Documentation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                         |
| <b>Summary of testing:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                         |
| <b>Tests performed (name of test and test clause):</b><br>cl.7.1 Charging procedure for test purposes (for Cells);<br>cl.7.2.1 Continuous charging at constant voltage (cells);<br>cl.7.3.1 External short circuit (cells);<br>cl.7.3.3 Free fall (cells);<br>cl.7.3.4 Thermal abuse (cells);<br>cl.7.3.5 Crush (cells);<br>cl.7.3.7 Forced discharge (cells);<br>cl.7.3.9 Design evaluation – Forced internal short circuit (cells)<br>cl. 8.2 Small Battery and Cell safety information(cells)<br><br>Tests are made with the number of cells and batteries specified in IEC 62133-2:2017+AMD1:2021 Table 1. | <b>Testing location:</b><br>Shenzhen NCT Testing Technology Co., Ltd.<br>B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China |
| <b>Summary of compliance with National Differences</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                         |
| N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                         |
| <input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133-2: 2017+A1:2021</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                         |

**Copy of marking plate**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

N/A

**Remark**

By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked.





|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test item particulars..... :</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                              |
| <b>Classification of installation and use.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | To be defined in final product                                                                                                               |
| <b>Supply connection.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Electrode tab                                                                                                                                |
| <b>Recommend charging method declared by the manufacturer.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Charging the battery with 18mA constant current until 4.2V, then constant voltage until charge current reduces to 1.8mA at ambient 20°C±5°C. |
| <b>Discharge current (0,2 I<sub>L</sub> A).....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 18mA                                                                                                                                         |
| <b>Specified final voltage.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 3.0V                                                                                                                                         |
| <b>Upper limit charging voltage per cell.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4.2V                                                                                                                                         |
| <b>Maximum charging current.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 90mA                                                                                                                                         |
| <b>Charging temperature upper limit.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 45°C                                                                                                                                         |
| <b>Charging temperature lower limit.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0°C                                                                                                                                          |
| <b>Polymer cell electrolyte type.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A                          |
| <b>Possible test case verdicts:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                              |
| - test case does not apply to the test object.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | N/A                                                                                                                                          |
| - test object does meet the requirement.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | P (Pass)                                                                                                                                     |
| - test object does not meet the requirement.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | F (Fail)                                                                                                                                     |
| <b>Testing..... :</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                              |
| <b>Date of receipt of test item.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2024-12-15                                                                                                                                   |
| <b>Date (s) of performance of tests.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2024-12-15 to 2024-12-25                                                                                                                     |
| <b>General remarks:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                              |
| <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p><b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b></p> |                                                                                                                                              |
| <b>Name and address of factory (ies) .....:</b> Same as Applicant                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                              |

**General product information:**

The cell consists of the positive electrode plate, negative electrode plate, separator, electrolyte, case. The positive and negative electrode plates are housed in the case in the state being separated by the separator.


The main features of the cell are shown as below (clause 7.1.1):

| Model<br>(Cell) | Nominal<br>capacity | Nominal<br>voltage | Nominal<br>Charge<br>Current | Nominal<br>Discharge<br>Current | Maximum<br>Charge<br>Current | Maximum<br>Discharge<br>Current | Maximum<br>Charge<br>Voltage | Cut-off<br>Voltage |
|-----------------|---------------------|--------------------|------------------------------|---------------------------------|------------------------------|---------------------------------|------------------------------|--------------------|
| GX 401030       | 90mAh               | 3.7V               | 18mA                         | 18mA                            | 90mA                         | 90mA                            | 4.2V                         | 3.0V               |

The main features of the cell are shown as below (clause 7.1.2):

| Model<br>(Cell) | Upper limit<br>charge voltage | Taper-off<br>current | Lower charge<br>temperature | Upper charge<br>temperature |
|-----------------|-------------------------------|----------------------|-----------------------------|-----------------------------|
| GX 401030       | 4.2V                          | 4.5mA                | 0°C                         | 45°C                        |

**Construction:**

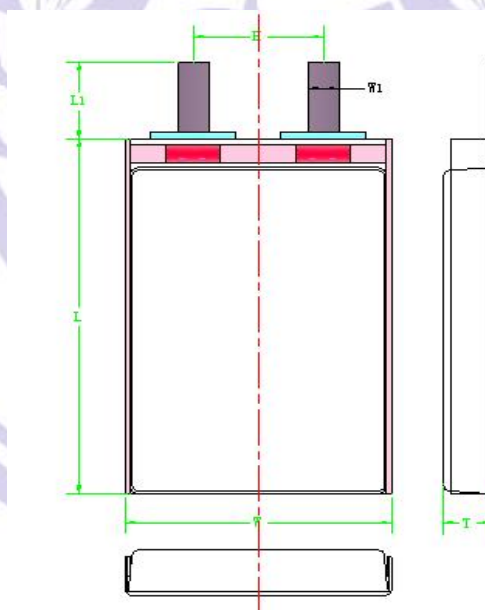

L: 30.0mm

W: 10.0mm

T: 4.0mm

Cell

**Circuit diagram:**

None, cell only

| IEC 62133-2 |                                                                                                                                                                                                                            |                                                            |         |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                         | Result - Remark                                            | Verdict |
| <b>4</b>    | <b>PARAMETER MEASUREMENT TOLERANCES</b>                                                                                                                                                                                    |                                                            | P       |
|             | Parameter measurement tolerances                                                                                                                                                                                           |                                                            | P       |
| <b>5</b>    | <b>GENERAL SAFETY CONSIDERATIONS</b>                                                                                                                                                                                       |                                                            | P       |
| <b>5.1</b>  | <b>General</b>                                                                                                                                                                                                             |                                                            | P       |
|             | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse                                                                                 |                                                            | P       |
| <b>5.2</b>  | <b>Insulation and wiring</b>                                                                                                                                                                                               |                                                            | N/A     |
|             | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ                                                 | Cell only.                                                 | N/A     |
|             | Insulation resistance (MΩ)..... :                                                                                                                                                                                          |                                                            | —       |
|             | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements                                                                                               |                                                            | N/A     |
|             | Orientation of wiring maintains adequate clearances and creepage distances between conductors                                                                                                                              |                                                            | N/A     |
|             | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse                                                                                                                                    |                                                            | N/A     |
| <b>5.3</b>  | <b>Venting</b>                                                                                                                                                                                                             |                                                            | P       |
|             | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on narrow side of the pouch cell. | P       |
|             | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief                                                                      |                                                            | N/A     |
| <b>5.4</b>  | <b>Temperature, voltage and current management</b>                                                                                                                                                                         |                                                            | N/A     |
|             | Batteries are designed such that abnormal temperature rise conditions are prevented                                                                                                                                        | Cell only.                                                 | N/A     |
|             | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer                                                                                                             |                                                            | N/A     |
|             | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified |                                                            | N/A     |
| <b>5.5</b>  | <b>Terminal contacts</b>                                                                                                                                                                                                   |                                                            | P       |

| IEC 62133-2 |                                                                                                                                                                                                                                            |                 |         |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                         | Result - Remark | Verdict |
|             | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current                                                                                                                                     |                 | P       |
|             | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance                                                                                                             |                 | P       |
|             | Terminal contacts are arranged to minimize the risk of short circuits                                                                                                                                                                      |                 | P       |
| <b>5.6</b>  | <b>Assembly of cells into batteries</b>                                                                                                                                                                                                    |                 | N/A     |
| 5.6.1       | General                                                                                                                                                                                                                                    |                 | N/A     |
|             | Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region                                               | Cell only.      | N/A     |
|             | This protection may be provided external to the battery such as within the charger or the end devices                                                                                                                                      |                 | N/A     |
|             | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation                                                                  |                 | N/A     |
|             | If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions                                                                        |                 | N/A     |
|             | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly                                                                                     |                 | N/A     |
|             | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                             |                 | N/A     |
|             | Protective circuit components are added as appropriate and consideration given to the end-device application                                                                                                                               |                 | N/A     |
|             | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance |                 | N/A     |
| 5.6.2       | Design recommendation                                                                                                                                                                                                                      |                 | N/A     |
|             | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2                                    | Cell only.      | N/A     |



| IEC 62133-2 |                                                                                                                                                                                                                                                                                                                                                          |                 |         |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                                                                                                       | Result - Remark | Verdict |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks |                 | N/A     |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks                |                 | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection                                                                                                                                                                                                                    |                 | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer                                                                                                                                                              |                 | N/A     |
|             | It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage                                                                                                                                                                                                                               |                 | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system                                                                                                                                                                                                          |                 | N/A     |
| 5.6.3       | Mechanical protection for cells and components of batteries                                                                                                                                                                                                                                                                                              | Cell only.      | N/A     |
|             | Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse                                                                                                                                                                   |                 | N/A     |
|             | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product                                                                                                                                                                           |                 | N/A     |
|             | The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer                                                                                                                                                                          |                 | N/A     |
|             | For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests                                                                                                                                                                                |                 | N/A     |
| 5.7         | Quality plan                                                                                                                                                                                                                                                                                                                                             |                 | P       |

| IEC 62133-2 |                                                                                                                                                                                                                               |                                            |         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                            | Result - Remark                            | Verdict |
|             | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | Complied.<br>Quality plan provided.        | P       |
| 5.8         | <b>Battery safety components</b>                                                                                                                                                                                              | See TABLE: Critical components information | N/A     |

|          |                                                                                                                                                                                                           |                |     |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----|
| <b>6</b> | <b>TYPE TEST AND SAMPLE SIZE</b>                                                                                                                                                                          |                | P   |
|          | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old                                                                  |                | P   |
|          | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 $\Omega$ are tested in accordance with Table 1                 | Not coin cells | N/A |
|          | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C $\pm$ 5 °C                                                                                                           |                | P   |
|          | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection                                            | Cell only.     | N/A |
|          | When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test | Cell only.     | N/A |

|            |                                                                                                                                                                                                |             |   |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---|
| <b>7</b>   | <b>SPECIFIC REQUIREMENTS AND TESTS</b>                                                                                                                                                         |             | P |
| <b>7.1</b> | <b>Charging procedure for test purposes</b>                                                                                                                                                    |             | P |
| 7.1.1      | First procedure                                                                                                                                                                                |             | P |
|            | This charging procedure applies to subclauses other than those specified in 7.1.2                                                                                                              |             | P |
|            | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C $\pm$ 5 °C, using the method declared by the manufacturer | See page 4. | P |
|            | Prior to charging, the battery has been discharged at 20 °C $\pm$ 5 °C at a constant current of 0,2 It A down to a specified final voltage                                                     | See page 4. | P |
| 7.1.2      | Second procedure                                                                                                                                                                               |             | P |
|            | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9                                                                                                                         |             | P |

| IEC 62133-2 |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                      |         |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                                                                                                                               | Result - Remark                                                                                                      | Verdict |
|             | After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method | Charge temperature range:<br>0-45°C declared.<br>0°C used for lower limit tests.<br>45°C used for upper limit tests. | P       |
| <b>7.2</b>  | <b>Intended use</b>                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                      | P       |
| 7.2.1       | Continuous charging at constant voltage (cells)                                                                                                                                                                                                                                                                                                                                  |                                                                                                                      | P       |
|             | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer                                                                                                                                                                                                                           | Charging for 7 days with 18mA.                                                                                       | P       |
|             | Results: no fire, no explosion, no leakage..... :                                                                                                                                                                                                                                                                                                                                | (See appended table 7.2.1)                                                                                           | P       |
| 7.2.2       | Case stress at high ambient temperature (battery)                                                                                                                                                                                                                                                                                                                                | Cell only.                                                                                                           | N/A     |
|             | Oven temperature (°C)..... :                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                      | —       |
|             | Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells                                                                                                                                                                                                                                                            |                                                                                                                      | N/A     |
| <b>7.3</b>  | <b>Reasonably foreseeable misuse</b>                                                                                                                                                                                                                                                                                                                                             |                                                                                                                      | P       |
| 7.3.1       | External short-circuit (cell)                                                                                                                                                                                                                                                                                                                                                    | Tested complied.                                                                                                     | P       |
|             | The cells were tested until one of the following occurred:                                                                                                                                                                                                                                                                                                                       |                                                                                                                      | P       |
|             | - 24 hours elapsed; or                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                      | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                                                                                                                                                                                                          |                                                                                                                      | P       |
|             | Results: no fire, no explosion..... :                                                                                                                                                                                                                                                                                                                                            | (See appended table 7.3.1)                                                                                           | P       |
| 7.3.2       | External short-circuit (battery)                                                                                                                                                                                                                                                                                                                                                 | Cell only.                                                                                                           | N/A     |
|             | The batteries were tested until one of the following occurred:                                                                                                                                                                                                                                                                                                                   |                                                                                                                      | N/A     |
|             | - 24 hours elapsed; or                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                      | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                                                                                                                                                                                                          |                                                                                                                      | N/A     |
|             | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition                                                                                                                                                                                                       |                                                                                                                      | N/A     |
|             | A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test                                                                                                                                                                                              |                                                                                                                      | N/A     |



| IEC 62133-2 |                                                                                                                                                                                                |                            |         |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                             | Result - Remark            | Verdict |
|             | A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor |                            | N/A     |
|             | Results: no fire, no explosion.....:                                                                                                                                                           |                            | N/A     |
| 7.3.3       | Free fall                                                                                                                                                                                      | Tested complied.           | P       |
|             | Results: no fire, no explosion                                                                                                                                                                 | No fire. No explosion      | P       |
| 7.3.4       | Thermal abuse (cells)                                                                                                                                                                          | Tested complied.           | P       |
|             | Oven temperature (°C).....:                                                                                                                                                                    | 130°C                      | —       |
|             | Results: no fire, no explosion                                                                                                                                                                 | No fire. No explosion      | P       |
| 7.3.5       | Crush (cells)                                                                                                                                                                                  | Tested complied.           | P       |
|             | The crushing force was released upon:                                                                                                                                                          |                            | P       |
|             | - The maximum force of 13 kN ± 0,78 kN has been applied; or                                                                                                                                    |                            | P       |
|             | - An abrupt voltage drop of one-third of the original voltage has been obtained                                                                                                                |                            | N/A     |
|             | Results: no fire, no explosion.....:                                                                                                                                                           | (See appended table 7.3.5) | P       |
| 7.3.6       | Over-charging of battery                                                                                                                                                                       | Cell only.                 | N/A     |
|             | The supply voltage which is:                                                                                                                                                                   |                            | N/A     |
|             | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or                                                          |                            | N/A     |
|             | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and                                                                     |                            | N/A     |
|             | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached                                                                      |                            | N/A     |
|             | Test was continued until the temperature of the outer casing:                                                                                                                                  |                            | N/A     |
|             | - Reached steady state conditions (less than 10 °C change in 30-minute period); or                                                                                                             |                            | N/A     |
|             | - Returned to ambient                                                                                                                                                                          |                            | N/A     |
|             | Results: no fire, no explosion.....:                                                                                                                                                           |                            | N/A     |
| 7.3.7       | Forced discharge (cells)                                                                                                                                                                       | Tested complied.           | P       |
|             | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer                                                                                                |                            | P       |



| IEC 62133-2 |                                                                                                                                                                                                                                                                       |                                                                    |         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                    | Result - Remark                                                    | Verdict |
|             | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage                                                                                                                                       |                                                                    | P       |
|             | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration |                                                                    | N/A     |
|             | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration                                                                                      |                                                                    | P       |
|             | Results: no fire, no explosion.....:                                                                                                                                                                                                                                  | (See appended table 7.3.7)                                         | P       |
| 7.3.8       | Mechanical tests (batteries)                                                                                                                                                                                                                                          |                                                                    | N/A     |
| 7.3.8.1     | Vibration                                                                                                                                                                                                                                                             | Cell only.                                                         | N/A     |
|             | Results: no fire, no explosion, no rupture, no leakage or venting.....:                                                                                                                                                                                               |                                                                    | N/A     |
| 7.3.8.2     | Mechanical shock                                                                                                                                                                                                                                                      | Cell only.                                                         | N/A     |
|             | Results: no leakage, no venting, no rupture, no explosion and no fire.....:                                                                                                                                                                                           |                                                                    | N/A     |
| 7.3.9       | Design evaluation – Forced internal short-circuit (cells)                                                                                                                                                                                                             | Tested complied.                                                   | P       |
|             | The cells complied with national requirement for.....:                                                                                                                                                                                                                | France, Japan, Republic of Korea, Switzerland                      | —       |
|             | The pressing was stopped upon:                                                                                                                                                                                                                                        |                                                                    | P       |
|             | - A voltage drop of 50 mV has been detected; or                                                                                                                                                                                                                       |                                                                    | N/A     |
|             | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached                                                                                                                                                                         | 400N for prismatic cells.                                          | P       |
|             | Results: no fire.....:                                                                                                                                                                                                                                                | (See appended table 7.3.9)                                         | P       |
| <b>8</b>    | <b>INFORMATION FOR SAFETY</b>                                                                                                                                                                                                                                         |                                                                    | P       |
| <b>8.1</b>  | <b>General</b>                                                                                                                                                                                                                                                        |                                                                    | P       |
|             | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products                                                                                                                                                 | Information for safety mentioned in manufacturer's specifications. | P       |
|             | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users                                                                                                                                |                                                                    | N/A     |

| IEC 62133-2 |                                                                                                                                                                     |                                                            |         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                  | Result - Remark                                            | Verdict |
|             | Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product           |                                                            | N/A     |
|             | As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user                                           |                                                            | N/A     |
|             | Do not allow children to replace batteries without adult supervision                                                                                                |                                                            | N/A     |
| <b>8.2</b>  | <b>Small cell and battery safety information</b>                                                                                                                    | small cells                                                | P       |
|             | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:                          | Information for safety mentioned on equipment's package.   | P       |
|             | - Keep small cells and batteries which are considered swallowable out of the reach of children                                                                      |                                                            | P       |
|             | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion                                               |                                                            | P       |
|             | - In case of ingestion of a cell or battery, seek medical assistance promptly                                                                                       |                                                            | P       |
| <b>9</b>    | <b>MARKING</b>                                                                                                                                                      |                                                            | P       |
| <b>9.1</b>  | <b>Cell marking</b>                                                                                                                                                 |                                                            | P       |
|             | Cells are marked as specified in IEC 61960, except coin cells                                                                                                       |                                                            | N/A     |
|             | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity                                      |                                                            | N/A     |
|             | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked | Agreement between the cell manufacturer and user provided. | P       |
| <b>9.2</b>  | <b>Battery marking</b>                                                                                                                                              | Cell only.                                                 | N/A     |
|             | Batteries are marked as specified in IEC 61960, except for coin batteries                                                                                           |                                                            | N/A     |
|             | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity                              |                                                            | N/A     |
|             | Batteries are marked with an appropriate caution statement                                                                                                          |                                                            | N/A     |
|             | - Terminals have clear polarity marking on the external surface of the battery, or                                                                                  |                                                            | N/A     |

| IEC 62133-2    |                                                                                                                                                      |                                                          |         |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------|
| Clause         | Requirement + Test                                                                                                                                   | Result - Remark                                          | Verdict |
|                | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections                                 |                                                          | N/A     |
| <b>9.3</b>     | <b>Caution for ingestion of small cells and batteries</b>                                                                                            | small cells.                                             | N/A     |
|                | Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2         | Not coin cells                                           | N/A     |
|                | Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package | Not intended for direct sale.                            | N/A     |
| <b>9.4</b>     | <b>Other information</b>                                                                                                                             |                                                          | N/A     |
|                | The following information are marked on or supplied with the battery:                                                                                |                                                          | N/A     |
|                | - Storage and disposal instructions                                                                                                                  |                                                          | N/A     |
|                | - Recommended charging instructions                                                                                                                  |                                                          | N/A     |
| <b>10</b>      | <b>PACKAGING AND TRANSPORT</b>                                                                                                                       |                                                          | N/A     |
|                | Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3                                         |                                                          | N/A     |
| <b>ANNEX A</b> | <b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>                                                                    |                                                          | P       |
| <b>A.1</b>     | <b>General</b>                                                                                                                                       |                                                          | P       |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>                                                                                                       | Complied.                                                | P       |
| <b>A.3</b>     | <b>Consideration on charging voltage</b>                                                                                                             | Complied.                                                | P       |
| A.3.1          | General                                                                                                                                              |                                                          | P       |
| A.3.2          | Upper limit charging voltage                                                                                                                         | 4.2V applied.                                            | P       |
| A.3.2.1        | General                                                                                                                                              |                                                          | P       |
| A.3.2.2        | Explanation of safety viewpoint                                                                                                                      |                                                          | P       |
| A.3.2.3        | Safety requirements, when different upper limit charging voltage is applied                                                                          | 4.2V applied.                                            | P       |
| <b>A.4</b>     | <b>Consideration of temperature and charging current</b>                                                                                             |                                                          | P       |
| A.4.1          | General                                                                                                                                              |                                                          | P       |
| A.4.2          | Recommended temperature range                                                                                                                        | Charging temperature range declared by client is: 0-45°C | P       |
| A.4.2.1        | General                                                                                                                                              |                                                          | P       |




| IEC 62133-2 |                                                                                               |                                                                                    |         |
|-------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                            | Result - Remark                                                                    | Verdict |
| A.4.2.2     | Safety consideration when a different recommended temperature range is applied                |                                                                                    | P       |
| A.4.3       | High temperature range                                                                        |                                                                                    | N/A     |
| A.4.3.1     | General                                                                                       |                                                                                    | N/A     |
| A.4.3.2     | Explanation of safety viewpoint                                                               |                                                                                    | N/A     |
| A.4.3.3     | Safety considerations when specifying charging conditions in the high temperature range       |                                                                                    | N/A     |
| A.4.3.4     | Safety considerations when specifying a new upper limit in the high temperature range         |                                                                                    | N/A     |
| A.4.4       | Low temperature range                                                                         |                                                                                    | N/A     |
| A.4.4.1     | General                                                                                       |                                                                                    | N/A     |
| A.4.4.2     | Explanation of safety viewpoint                                                               |                                                                                    | N/A     |
| A.4.4.3     | Safety considerations, when specifying charging conditions in the low temperature range       |                                                                                    | N/A     |
| A.4.4.4     | Safety considerations when specifying a new lower limit in the low temperature range          |                                                                                    | N/A     |
| A.4.5       | Scope of the application of charging current                                                  |                                                                                    | P       |
| A.4.6       | Consideration of discharge                                                                    |                                                                                    | P       |
| A.4.6.1     | General                                                                                       |                                                                                    | P       |
| A.4.6.2     | Final discharge voltage and explanation of safety viewpoint                                   | Cell specified final voltage 3.0V, not exceed 3.0V specified by cell manufacturer. | P       |
| A.4.6.3     | Discharge current and temperature range                                                       |                                                                                    | P       |
| A.4.6.4     | Scope of application of the discharging current                                               |                                                                                    | P       |
| <b>A.5</b>  | <b>Sample preparation</b>                                                                     |                                                                                    | P       |
| A.5.1       | General                                                                                       |                                                                                    | P       |
| A.5.2       | Insertion procedure for nickel particle to generate internal short                            |                                                                                    | P       |
| A.5.3       | Disassembly of charged cell                                                                   |                                                                                    | P       |
| A.5.4       | Shape of nickel particle                                                                      |                                                                                    | P       |
| A.5.5       | Insertion of nickel particle in cylindrical cell                                              |                                                                                    | N/A     |
| A.5.5.1     | Insertion of nickel particle in winding core                                                  |                                                                                    | N/A     |
| A.5.5.2     | Marking the position of the nickel particle on both ends of the winding core of the separator |                                                                                    | N/A     |
| A.5.6       | Insertion of nickel particle in prismatic cell                                                |                                                                                    | P       |
| <b>A.6</b>  | <b>Experimental procedure of the forced internal short-circuit test</b>                       |                                                                                    | P       |



| IEC 62133-2    |                                                                                                                                        |                          |         |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------|
| Clause         | Requirement + Test                                                                                                                     | Result - Remark          | Verdict |
| A.6.1          | Material and tools for preparation of nickel particle                                                                                  |                          | P       |
| A.6.2          | Example of a nickel particle preparation procedure                                                                                     |                          | P       |
| A.6.3          | Positioning (or placement) of a nickel particle                                                                                        |                          | P       |
| A.6.4          | Damaged separator precaution                                                                                                           |                          | P       |
| A.6.5          | Caution for rewinding separator and electrode                                                                                          |                          | P       |
| A.6.6          | Insulation film for preventing short-circuit                                                                                           |                          | P       |
| A.6.7          | Caution when disassembling a cell                                                                                                      |                          | P       |
| A.6.8          | Protective equipment for safety                                                                                                        |                          | P       |
| A.6.9          | Caution in the case of fire during disassembling                                                                                       |                          | P       |
| A.6.10         | Caution for the disassembling process and pressing the electrode core                                                                  |                          | P       |
| A.6.11         | Recommended specifications for the pressing device                                                                                     |                          | P       |
| <b>ANNEX B</b> | <b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>                                                               |                          | N/A     |
| <b>ANNEX C</b> | <b>RECOMMENDATIONS TO THE END-USERS</b>                                                                                                |                          | N/A     |
| <b>ANNEX D</b> | <b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>                                                                        |                          | N/A     |
| <b>D.1</b>     | <b>General</b>                                                                                                                         | Not coin cells.          | N/A     |
| <b>D.2</b>     | <b>Method</b>                                                                                                                          |                          | N/A     |
|                | A sample size of three coin cells is required for this measurement                                                                     |                          | N/A     |
|                | Coin cells with an internal resistance greater than 3 $\Omega$ require no further testing..... :                                       | (See appended table D.2) | N/A     |
|                | Coin cells with an internal resistance less than or equal to 3 $\Omega$ are subjected to the testing according to Clause 6 and Table 1 |                          | N/A     |
| <b>ANNEX E</b> | <b>PACKAGING AND TRANSPORT</b>                                                                                                         |                          | N/A     |
| <b>ANNEX F</b> | <b>COMPONENT STANDARDS REFERENCES</b>                                                                                                  |                          | N/A     |

| 5.1 – 5.6                      | TABLE: Critical components information |            |                                                        |          | P                        |
|--------------------------------|----------------------------------------|------------|--------------------------------------------------------|----------|--------------------------|
| Object/part no.                | Manufacturer/<br>trademark             | Type/model | Technical data                                         | Standard | Mark(s) of<br>conformity |
| -Positive<br>electrode         | --                                     | --         | LiCoO <sub>2</sub> , PVDF, NMP,<br>Conductive Additive | --       | --                       |
| -Negative<br>electrode         | --                                     | --         | Graphite, CMC, SBR,<br>Distilled Water,<br>Conductive  | --       | --                       |
| -Separator                     | --                                     | --         | PE, Shutdown<br>temperature: 130°C                     | --       | --                       |
| -Electrolyte                   | --                                     | --         | LiPF <sub>6</sub> +EMC+EC+DMC                          | --       | --                       |
| Supplementary information: N/A |                                        |            |                                                        |          |                          |

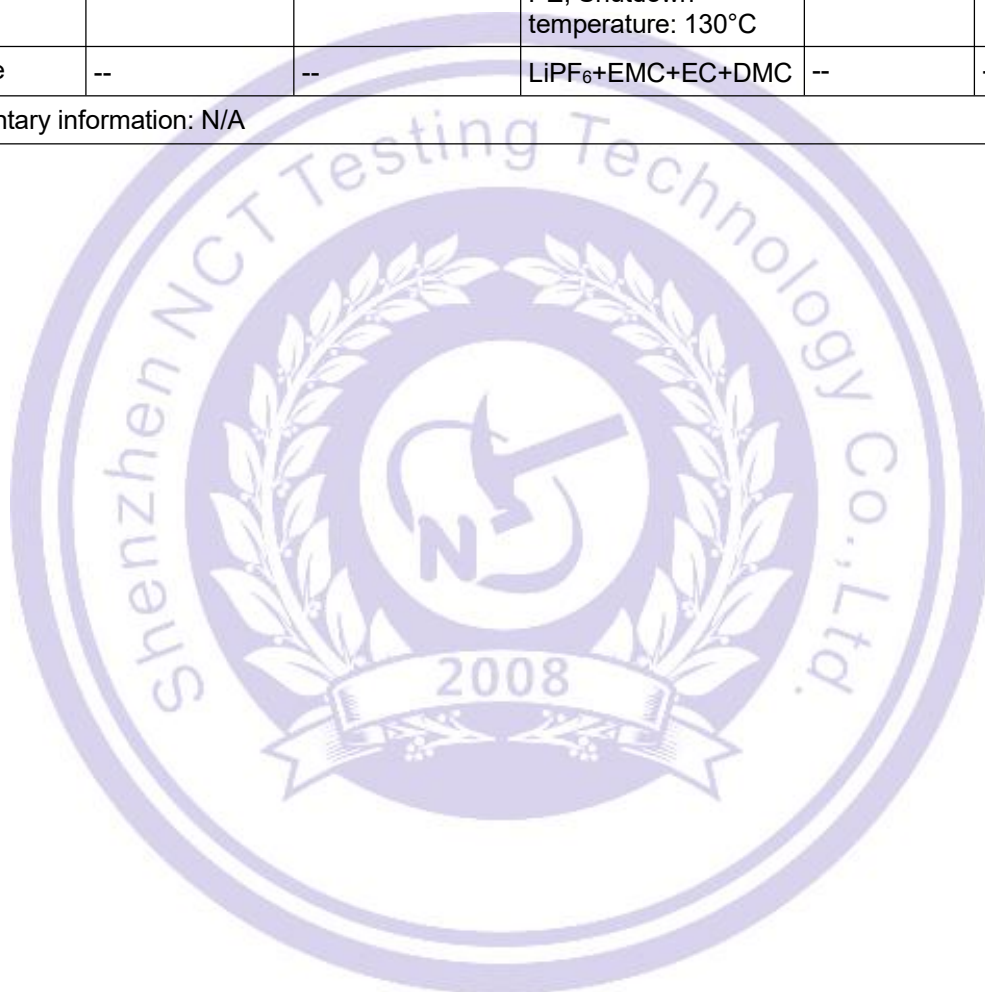

| 7.2.1                                                                       | TABLE: Continuous charging at constant voltage (cells) |                                                      |                      |         | P |
|-----------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------|----------------------|---------|---|
| Sample no.                                                                  | Recommended charging voltage<br>Vc (Vdc)               | Recommended charging current<br>I <sub>rec</sub> (A) | OCV before test(Vdc) | Results |   |
| Cell #1                                                                     | 4.20                                                   | 0.018                                                | 4.18                 | P       |   |
| Cell #2                                                                     | 4.20                                                   | 0.018                                                | 4.19                 | P       |   |
| Cell #3                                                                     | 4.20                                                   | 0.018                                                | 4.19                 | P       |   |
| Cell #4                                                                     | 4.20                                                   | 0.018                                                | 4.18                 | P       |   |
| Cell #5                                                                     | 4.20                                                   | 0.018                                                | 4.19                 | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No leakage |                                                        |                                                      |                      |         |   |

| 7.3.1                                                             | TABLE: External short-circuit (cell) |                       |                            |                                       | P       |
|-------------------------------------------------------------------|--------------------------------------|-----------------------|----------------------------|---------------------------------------|---------|
| Sample no.                                                        | Ambient T (°C)                       | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (°C) | Results |
| <b>Samples charged at charging temperature upper limit (45°C)</b> |                                      |                       |                            |                                       |         |
| Cell #1                                                           | 55.5                                 | 4.17                  | 82.7                       | 116.6                                 | P       |
| Cell #2                                                           | 55.5                                 | 4.16                  | 81.6                       | 114.6                                 | P       |
| Cell #3                                                           | 55.5                                 | 4.16                  | 78.5                       | 115.9                                 | P       |
| Cell #4                                                           | 55.5                                 | 4.17                  | 77.5                       | 116.7                                 | P       |
| Cell #5                                                           | 55.5                                 | 4.16                  | 81.2                       | 117.4                                 | P       |
| <b>Samples charged at charging temperature lower limit (0°C)</b>  |                                      |                       |                            |                                       |         |
| Cell #6                                                           | 55.6                                 | 4.14                  | 80.2                       | 117.0                                 | P       |
| Cell #7                                                           | 55.6                                 | 4.13                  | 74.6                       | 114.4                                 | P       |
| Cell #8                                                           | 55.6                                 | 4.13                  | 86.1                       | 118.6                                 | P       |
| Cell #9                                                           | 55.6                                 | 4.14                  | 81.0                       | 117.8                                 | P       |
| Cell #10                                                          | 55.6                                 | 4.13                  | 83.4                       | 119.6                                 | P       |
| <b>Supplementary information:</b><br>- No fire or explosion       |                                      |                       |                            |                                       |         |

| 7.3.2                      | TABLE: External short-circuit (battery) |                       |                            |                                               |                                  | N/A     |
|----------------------------|-----------------------------------------|-----------------------|----------------------------|-----------------------------------------------|----------------------------------|---------|
| Sample no.                 | Ambient T (°C)                          | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T$ (°C) | Component single fault condition | Results |
|                            |                                         |                       |                            |                                               |                                  |         |
|                            |                                         |                       |                            |                                               |                                  |         |
|                            |                                         |                       |                            |                                               |                                  |         |
|                            |                                         |                       |                            |                                               |                                  |         |
|                            |                                         |                       |                            |                                               |                                  |         |
| Supplementary information: |                                         |                       |                            |                                               |                                  |         |

|                                                            |                       |                                        |                                                     |         |   |
|------------------------------------------------------------|-----------------------|----------------------------------------|-----------------------------------------------------|---------|---|
| 7.3.5                                                      | TABLE: Crush (cells)  |                                        |                                                     |         | P |
| Sample no.                                                 | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results |   |
| Samples charged at charging temperature upper limit (45°C) |                       |                                        |                                                     |         |   |
| Cell #1                                                    | 4.16                  | 4.16                                   | 12.91                                               | P       |   |
| Cell #2                                                    | 4.17                  | 4.16                                   | 13.05                                               | P       |   |
| Cell #3                                                    | 4.17                  | 4.17                                   | 13.02                                               | P       |   |
| Cell #4                                                    | 4.16                  | 4.15                                   | 12.97                                               | P       |   |
| Cell #5                                                    | 4.17                  | 4.17                                   | 13.09                                               | P       |   |
| Samples charged at charging temperature lower limit (0°C)  |                       |                                        |                                                     |         |   |
| Cell #6                                                    | 4.14                  | 4.13                                   | 12.90                                               | P       |   |
| Cell #7                                                    | 4.13                  | 4.13                                   | 13.08                                               | P       |   |
| Cell #8                                                    | 4.13                  | 4.12                                   | 13.04                                               | P       |   |
| Cell #9                                                    | 4.14                  | 4.14                                   | 12.93                                               | P       |   |
| Cell #10                                                   | 4.13                  | 4.13                                   | 12.92                                               | P       |   |
| Supplementary information:                                 |                       |                                        |                                                     |         |   |
| - No fire or explosion                                     |                       |                                        |                                                     |         |   |



| 7.3.6                               | TABLE: Over-charging of battery |                              |                                     |         | N/A |
|-------------------------------------|---------------------------------|------------------------------|-------------------------------------|---------|-----|
| Constant charging current (A).....: |                                 |                              |                                     |         | —   |
| Supply voltage (Vdc).....:          |                                 |                              |                                     |         | —   |
| Sample no.                          | OCV before charging (Vdc)       | Total charging time (minute) | Maximum outer case temperature (°C) | Results |     |
|                                     |                                 |                              |                                     |         |     |
|                                     |                                 |                              |                                     |         |     |
|                                     |                                 |                              |                                     |         |     |
|                                     |                                 |                              |                                     |         |     |
|                                     |                                 |                              |                                     |         |     |
| Supplementary information:          |                                 |                              |                                     |         |     |

| 7.3.7                                                       | TABLE: Forced discharge (cells)                |                                   |                                     |         | P |
|-------------------------------------------------------------|------------------------------------------------|-----------------------------------|-------------------------------------|---------|---|
| Sample no.                                                  | OCV before application of reverse charge (Vdc) | Measured reverse charge $I_r$ (A) | Lower limit discharge voltage (Vdc) | Results |   |
| Cell #1                                                     | 3.42                                           | 0.09                              | 3.00                                | P       |   |
| Cell #2                                                     | 3.42                                           | 0.09                              | 3.00                                | P       |   |
| Cell #3                                                     | 3.41                                           | 0.09                              | 3.00                                | P       |   |
| Cell #4                                                     | 3.42                                           | 0.09                              | 3.00                                | P       |   |
| Cell #5                                                     | 3.41                                           | 0.09                              | 3.00                                | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion |                                                |                                   |                                     |         |   |

| 7.3.8.1                    | TABLE: Vibration      |                      |                      |                    |         | N/A |
|----------------------------|-----------------------|----------------------|----------------------|--------------------|---------|-----|
| Sample no.                 | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test(g) | Results |     |
|                            |                       |                      |                      |                    |         |     |
|                            |                       |                      |                      |                    |         |     |
|                            |                       |                      |                      |                    |         |     |
| Supplementary information: |                       |                      |                      |                    |         |     |



|                            |                         |                      |                      |                    |         |     |
|----------------------------|-------------------------|----------------------|----------------------|--------------------|---------|-----|
| 7.3.8.2                    | TABLE: Mechanical shock |                      |                      |                    |         | N/A |
| Sample no.                 | OCV before test (Vdc)   | OCV after test (Vdc) | Mass before test (g) | Mass after test(g) | Results |     |
|                            |                         |                      |                      |                    |         |     |
|                            |                         |                      |                      |                    |         |     |
|                            |                         |                      |                      |                    |         |     |
| Supplementary information: |                         |                      |                      |                    |         |     |

| 7.3.9                                                                                                 | TABLE: Forced internal short circuit (cells) |                       |                                 |                              |         | P |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------|---------------------------------|------------------------------|---------|---|
| Sample no.                                                                                            | Chamber ambient T (°C)                       | OCV before test (Vdc) | Particle location <sup>1)</sup> | Maximum applied pressure (N) | Results |   |
| Samples charged at charging temperature upper limit (45°C)                                            |                                              |                       |                                 |                              |         |   |
| Cell #1                                                                                               | 45                                           | 4.17                  | 1                               | 400                          | P       |   |
| Cell #2                                                                                               | 45                                           | 4.16                  | 1                               | 400                          | P       |   |
| Cell #3                                                                                               | 45                                           | 4.17                  | 1                               | 400                          | P       |   |
| Cell #4                                                                                               | 45                                           | 4.17                  | 1                               | 400                          | P       |   |
| Cell #5                                                                                               | 45                                           | 4.16                  | 1                               | 400                          | P       |   |
| Samples charged at charging temperature lower limit (0°C)                                             |                                              |                       |                                 |                              |         |   |
| Cell #6                                                                                               | 0                                            | 4.13                  | 1                               | 400                          | P       |   |
| Cell #7                                                                                               | 0                                            | 4.13                  | 1                               | 400                          | P       |   |
| Cell #8                                                                                               | 0                                            | 4.14                  | 1                               | 400                          | P       |   |
| Cell #9                                                                                               | 0                                            | 4.13                  | 1                               | 400                          | P       |   |
| Cell #10                                                                                              | 0                                            | 4.14                  | 1                               | 400                          | P       |   |
| Supplementary information:                                                                            |                                              |                       |                                 |                              |         |   |
| 1)Identify one of the following:                                                                      |                                              |                       |                                 |                              |         |   |
| 1: Nickel particle inserted between positive and negative (active material) coated area.              |                                              |                       |                                 |                              |         |   |
| 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. |                                              |                       |                                 |                              |         |   |
| - No fire or explosion                                                                                |                                              |                       |                                 |                              |         |   |

| D.2                                                                                                                  | TABLE: Internal AC resistance for coin cells |                |                    |                       | N/A |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------|--------------------|-----------------------|-----|
| Sample no.                                                                                                           | Ambient T (°C)                               | Store time (h) | Resistance Rac (Ω) | Results <sup>1)</sup> |     |
| /                                                                                                                    | /                                            | /              | /                  | /                     |     |
| /                                                                                                                    | /                                            | /              | /                  | /                     |     |
| /                                                                                                                    | /                                            | /              | /                  | /                     |     |
| Supplementary information:                                                                                           |                                              |                |                    |                       |     |
| <sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables |                                              |                |                    |                       |     |



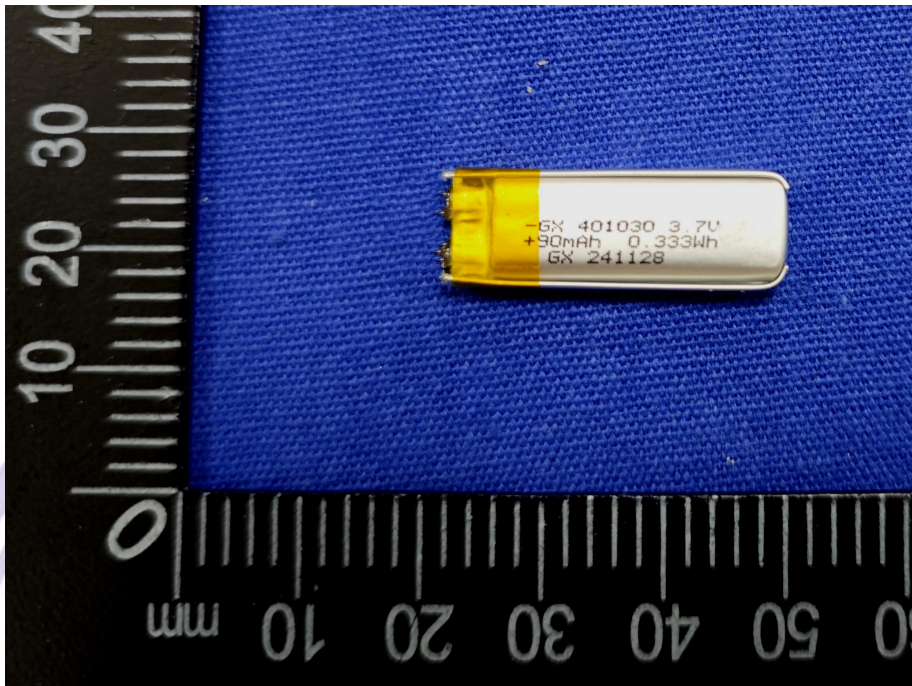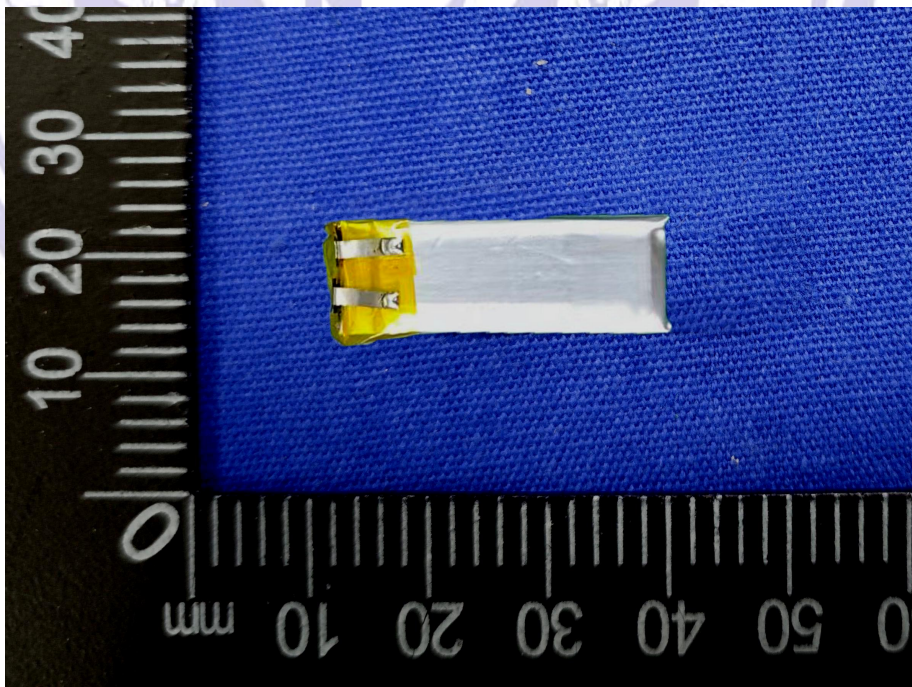

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Details of: | Fig.1–Front view of cell GX 401030                                                                                                                                                                                                                                                                                                                                                                                                                              |
|             |  <p>A photograph showing the front view of a small, rectangular, silver-colored battery cell. The cell is positioned horizontally on a blue textured surface. To the left of the cell is a black ruler with white markings, showing a scale from 0 to 40 mm. The cell has a yellow label with black text that reads: "GX 401030 3.7V", "+90mAh 0.333Wh", and "GX 241128".</p> |
| Details of: | Fig. 2–Back view of cell GX 401030                                                                                                                                                                                                                                                                                                                                                                                                                              |
|             |  <p>A photograph showing the back view of the same battery cell. The cell is positioned horizontally on a blue textured surface. To the left of the cell is a black ruler with white markings, showing a scale from 0 to 40 mm. The back of the cell is silver-colored and shows two yellow solder tabs on the left side.</p>                                               |

---End of Test Report---