



EMC TEST REPORT

Report Number.....: ZKT-2607201209E-2

Date of Test..... Jul. 20, 2026 to Jul. 28, 2026

Date of issue.....: Jul. 28, 2026

Total number of pages..... 43

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Mid Ocean Brands B.V.

Address: Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.

Manufacturer's name: 118897

Address: Shenzhen, Guangdong

Test specification:

Standard.....: ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-17 V3.3.1 (2024-09)

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-128_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.1(b) requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Smart watch

Trademark: /

Model/Type reference.....: MO2271

Ratings.....: Input: 5V== 0.5A
Battery: 3.7V, 180mAh, 0.666Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Jomcat Cao

Jomcat Cao

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





TABLE OF CONTENT

	Page
1. Version	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
3.1 TEST FACILITY	7
3.2 MEASUREMENT UNCERTAINTY	7
4. GENERAL INFORMATION	8
4.1. GENERAL DESCRIPTION OF EUT	8
4.2. DESCRIPTION OF TEST MODES	9
4.3. DESCRIPTION OF TEST SETUP	9
4.4. DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
4.5. MEASUREMENT INSTRUMENTS LIST	10
5. EMC EMISSION TEST	10
5.1. CONDUCTED EMISSION MEASUREMENT	12
5.1.1. POWER LINE CONDUCTED EMISSION	12
5.1.2. TEST PROCEDURE	13
5.1.3. TEST SETUP	13
5.1.4. EUT OPERATING CONDITIONS	13
5.1.5. TEST RESULTS	13
5.2. RADIATED EMISSION MEASUREMENT	14
5.2.1. LIMITS OF RADIATED EMISSION MEASUREMENT	14
5.2.2. LIMITS OF RADIATED EMISSION MEASUREMENT	14
5.2.3. TEST PROCEDURE	14
5.2.4. TEST SETUP	15
5.2.5. EUT OPERATING CONDITIONS	15
5.2.6. TEST RESULTS (30-1000MHz)	16
5.2.7. TEST RESULTS(1000-6000MHz)	18
5.3. LIMITS OF HARMONICS CURRENT	20
5.3.1. TEST PROCEDURE	21
5.3.2. EUT OPERATING CONDITIONS	21
5.3.3. TEST SETUP	21
5.3.4. TEST RESULTS	21
5.4. VOLTAGE FLUCTUATION AND FLICKERS	22
5.4.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS	22
5.4.2 TEST PROCEDURE	22
5.4.3 EUT OPERATING CONDITIONS	22
5.4.4 TEST SETUP	22
5.4.5 TEST RESULTS	22
6. EMC IMMUNITY TEST	23
6.1. GENERAL PERFORMANCE CRITERIA	23
6.2. GENERAL PERFORMANCE CRITERIA TEST SETUP	24



7. ESD TESTING	25
7.1 TEST SPECIFICATION	25
7.2 TEST PROCEDURE	25
7.3 TEST SETUP	26
7.4 TEST RESULTS	27
8. RS TESTING	28
8.1 TEST SPECIFICATION	28
8.2 TEST PROCEDURE	28
8.3 TEST SETUP	29
8.4 TEST RESULTS	30
9. EFT/BURST TESTING	31
9.1 TEST SPECIFICATION	31
9.2 TEST PROCEDURE	31
9.3 TEST SETUP	32
9.4 TEST RESULTS	32
10. SURGE TESTING	33
10.1 TEST SPECIFICATION	33
10.2 TEST PROCEDURE	33
10.3 TEST SETUP	34
10.4 TEST RESULTS	34
11. INJECTION CURRENT TESTING	35
11.1 TEST SPECIFICATION	35
11.2 TEST PROCEDURE	35
11.3 TEST SETUP	36
11.4 TEST RESULTS	36
12. VOLTAGE INTERRUPTION/DIPS TESTING	37
12.1 TEST SPECIFICATION	37
12.2 TEST PROCEDURE	37
12.3 TEST SETUP	37
12.4 TEST RESULTS	37
13. PHOTOS OF TEST SETUP	38
14. PHOTOS OF EUT	39



1. Version

Report No.	Issue Date	Description	Approved
ZKT-2607201209E-2	Jul. 28, 2026	Original	Valid



2. TEST SUMMARY

The Product has been tested according to the following specifications:

EMISSION(EN301489-1,EN301489-17)				
Standard	Test Item	Limit	Judgment	Remark
EN 55032	Conducted Emission	Class B	N/A	
	Radiated Emission	Class B	PASS	
EN 61000-3-2	Harmonic Current Emission	Class A or D NOTE (2)	N/A	
EN 61000-3-3	Voltage Fluctuations & Flicker	--	N/A	
EMC Immunity				
Section EN 55035	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2	Electrostatic Discharge	B	PASS	
EN 61000-4-3	RF electromagnetic field	A	PASS	
EN 61000-4-4	Fast transients	B	N/A	
EN 61000-4-5	Surges	B	N/A	
EN 61000-4-6	Injected Current	A	N/A	
EN 61000-4-8	Power Frequency Magnetic Field	A	N/A	
EN 61000-4-11	Volt. Interruptions Volt. Dips	B / C / C NOTE (3)	N/A	

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) The power consumption of EUT is less than 75W and no Limits apply.
- (3) Voltage dip: 100% reduction – Performance Criteria B
Voltage dip: 30% reduction – Performance Criteria C
Voltage Interruption: 100% Interruption – Performance Criteria C
- (4) For client's request and manual description, the test will not be executed.



3. MEASUREMENT UNCERTAINTY

3.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add.: ZKT Building & 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491

IC Registered No.: 27033

3.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
3	Conducted Emission (150kHz-30MHz)	$U=3.20\text{dB}$



4. GENERAL INFORMATION

4.1. GENERAL DESCRIPTION OF EUT

EUT Name	: Smart watch
Model No.	: MO2271
Serial Models	: /
Model Difference	: /
Trademark	: /
Power Supply	: Input: 5V  0.5A
Battery Capacity	: 3.7V, 180mAh, 0.666Wh
Bluetooth Version	: V6.0
Modulation Type	: EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK BLE: GFSK
Operation frequency	: 2402 ~ 2480MHz
Antenna Type	: Chip Antenna
Antenna Gain	: 0dBi Note: the antenna gain is provided by the customer, and the final test result has nothing to do with us.
Intend use environment	: Residential, commercial and light industrial environment

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



4.2. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For all Test Mode	Description
Mode 1	Bluetooth Working Mode

4.3. DESCRIPTION OF TEST SETUP

E-1
EUT

4.4. DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Smart watch	/	MO2271	/	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4.5. MEASUREMENT INSTRUMENTS LIST

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 23, 2025	Sep. 22, 2026
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Test Cable	N/A	C-01	N/A	N/A	May 25, 2026	May 24, 2027
4	Test Cable	N/A	C-02	N/A	N/A	May 25, 2026	May 24, 2027
5	Test Cable	N/A	C-03	N/A	N/A	May 25, 2026	May 24, 2027
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 24, 2025	Oct. 23, 2026
7	Triple-Loop Antenna	N/A	RF300	9194	N/A	Sep. 19, 2025	Sep. 18, 2026
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Sep. 23, 2025	Sep. 22, 2026
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May 25, 2026	May 24, 2027
12	Test Cable	N/A	R-02	N/A	N/A	May 25, 2026	May 24, 2027
13	Test Cable	N/A	R-03	N/A	N/A	May 26, 2026	May 25, 2027
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\

Harmonic / Flicker Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Harmonic & Flicker	HTEC	AC2000A	548549	1.21	Sep. 19, 2025	Sep. 18, 2026



		Instruments					
2	AC Power Source	/	HPHF4010	JN1022090795	DAL40	Sep. 19, 2025	Sep. 18, 2026

Electrostatic discharge Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	ESD TEST GENERATOR	HTEC	HESD16	/	004307	Sep. 19, 2025	Sep. 18, 2026

Radiated, radio-frequency, electromagnetic field immunity Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Power meter	Keysight	E4419B	GB43316770	N/A	Jul. 01, 2026	Jun. 30, 2027
2	Signal Generator	Agilent	N5181A	MY50145618	N/A	Jul. 01, 2026	Jun. 30, 2027
3	Power Amplifier	MKT	MPA-80-1000-250W	MDA26041119	N/A	Jul. 01, 2026	Jun. 30, 2027
4	Power Amplifier	MKT	MPA-1000-6000-100W	MPA2604120	N/A	Jul. 01, 2026	Jun. 30, 2027
5	Field Probe	Narda	EP601	811ZX10305	N/A	Jul. 01, 2026	Jun. 30, 2027
6	Power Probe	Keysight	E9304A H18	MY55200008	N/A	Jul. 01, 2026	Jun. 30, 2027
7	Power Probe	Keysight	E9304A H18	MY41495444	N/A	Jul. 01, 2026	Jun. 30, 2027
8	RS Antenna	QJD	QJD9129	202605001	N/A	Jul. 01, 2026	Jun. 30, 2027
9	RS Software	DS	TS+	5.0.0.2	N/A	\	\

EFT and Surge and Voltage dips and interruptions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Surge Generator	HTEC	HCOMPACT5	202501	V1.3.4	Sep. 19, 2025	Sep. 18, 2026
2	DIPS Generator	HTEC	HV1P16T	202501	V1.3.4	Sep. 19, 2025	Sep. 18, 2026
3	EFT/B Generator	HTEC	HCOMPACT5	202501	V1.3.4	Sep. 19, 2025	Sep. 18, 2026
4	EFT/B Clamp	HTEC	H3C	/	N/A	Sep. 19, 2025	Sep. 18, 2026

For Magnetic Field Immunity Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Generator	HTEC	HFMG 100	202602	V2.1-182802	Sep. 19, 2025	Sep. 18, 2026

Radio-frequency fields Immunity Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Signal Generator	TESEQ	NSG4070-75	31477	V1.30	Sep. 19, 2025	Sep. 18, 2026
2	CDN	SCHWARZBECK	CDN M2/M3PE 16A	00128	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Attenuator	GuoRenTong Xin	SGR-SJQ-6dB-DC-3	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
4	CS Software	SKET	EMC-S	V2.1.3.23	N/A	\	\



5. EMC EMISSION TEST

5.1. CONDUCTED EMISSION MEASUREMENT

5.1.1. POWER LINE CONDUCTED EMISSION

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



5.1.2. TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3. TEST SETUP

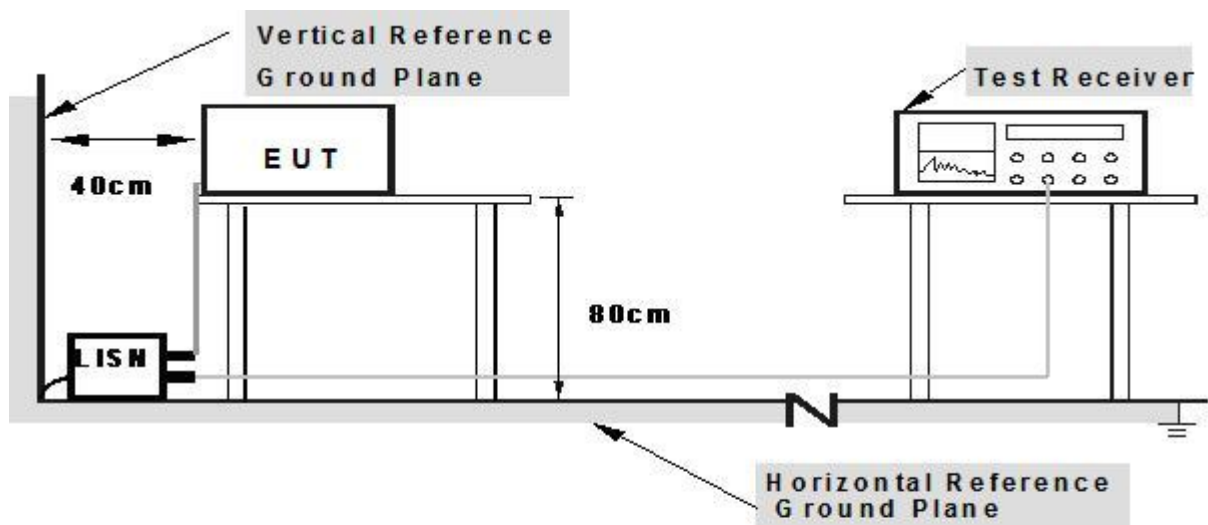

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.1.4. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5. TEST RESULTS

N/A

Only AC products need to test this item, DC products are not applicable.



5.2. RADIATED EMISSION MEASUREMENT

5.2.1. LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 – 1000	47	37

5.2.2. LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (at 10m) dBuV/m		Class B (at 10m) dBuV/m	
	Peak	Avg	Peak	Avg
1000-3000	76	56	70	50
3000-6000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to as following:
CISPR 22/ FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).


5.2.3. TEST PROCEDURE

- The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.




5.2.4. TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

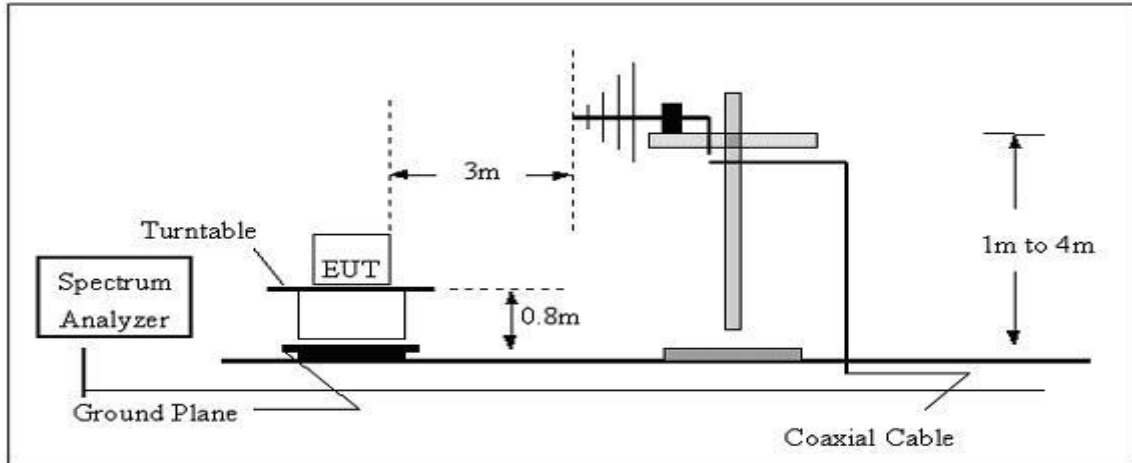

(B) Radiated Emission Test Set-UP Frequency Over 1GHz

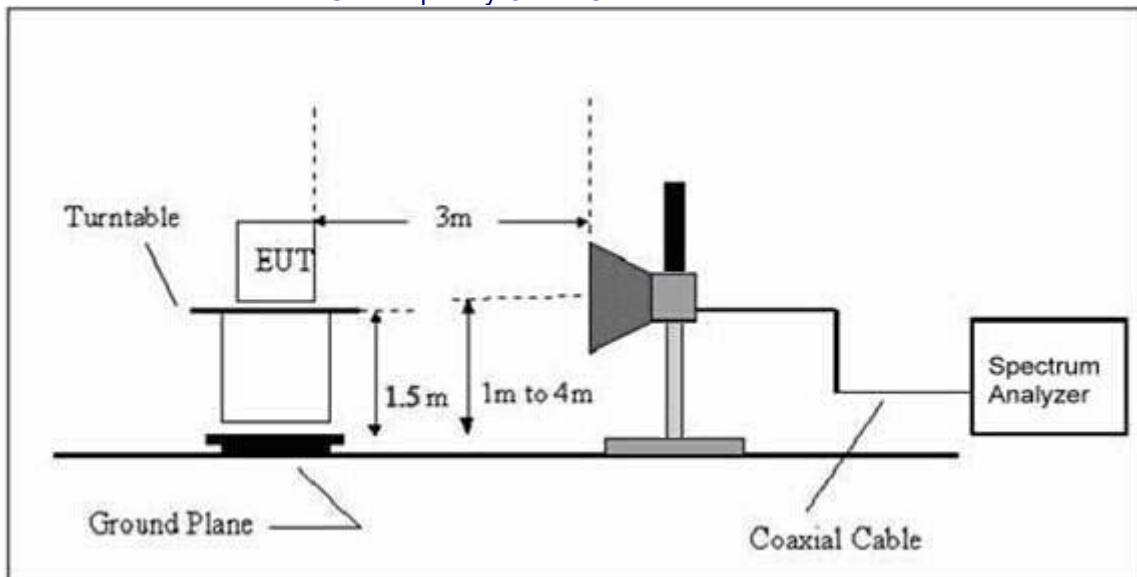


5.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.



5.2.6. TEST RESULTS (30-1000MHz)

Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V	Test Mode :	Mode 1

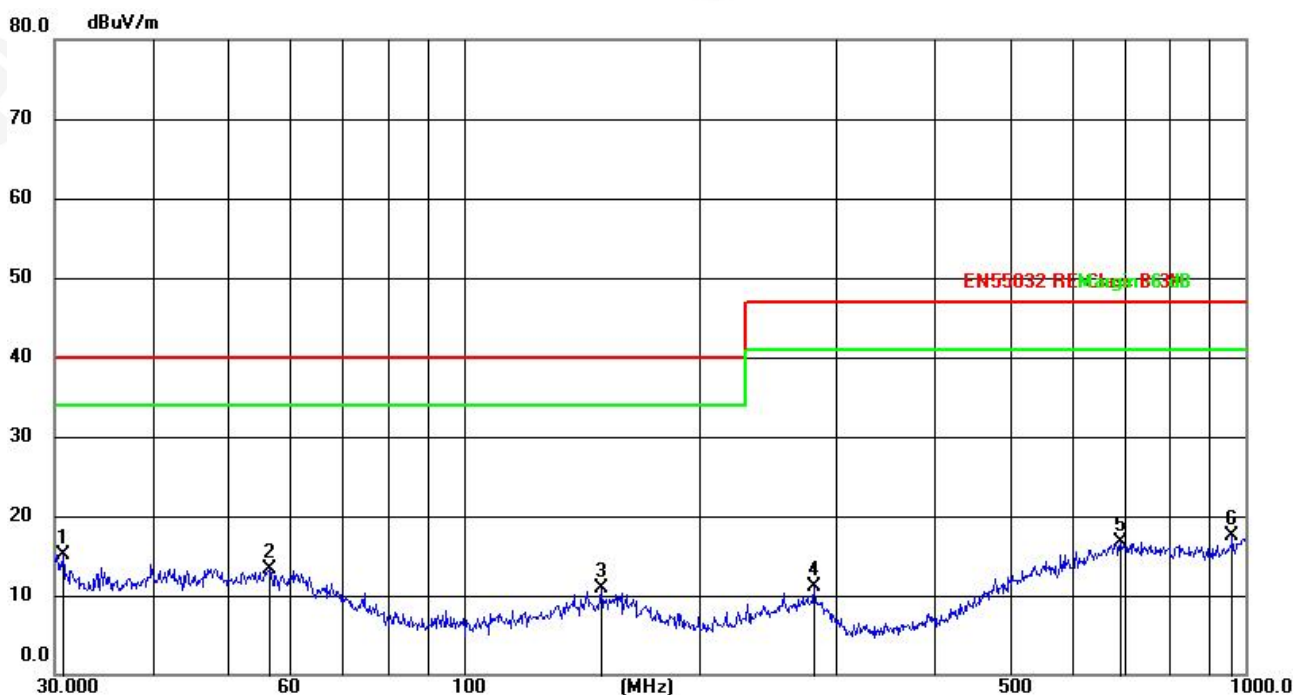


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7454	30.65	-15.52	15.13	40.00	-24.87	QP
2	56.3948	28.89	-15.51	13.38	40.00	-26.62	QP
3	150.0108	29.82	-18.94	10.88	40.00	-29.12	QP
4	281.0074	29.86	-18.77	11.09	47.00	-35.91	QP
5	691.9865	29.22	-12.61	16.61	47.00	-30.39	QP
6	962.1622	29.73	-12.25	17.48	47.00	-29.52	QP

Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.



Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V	Test Mode :	Mode 1

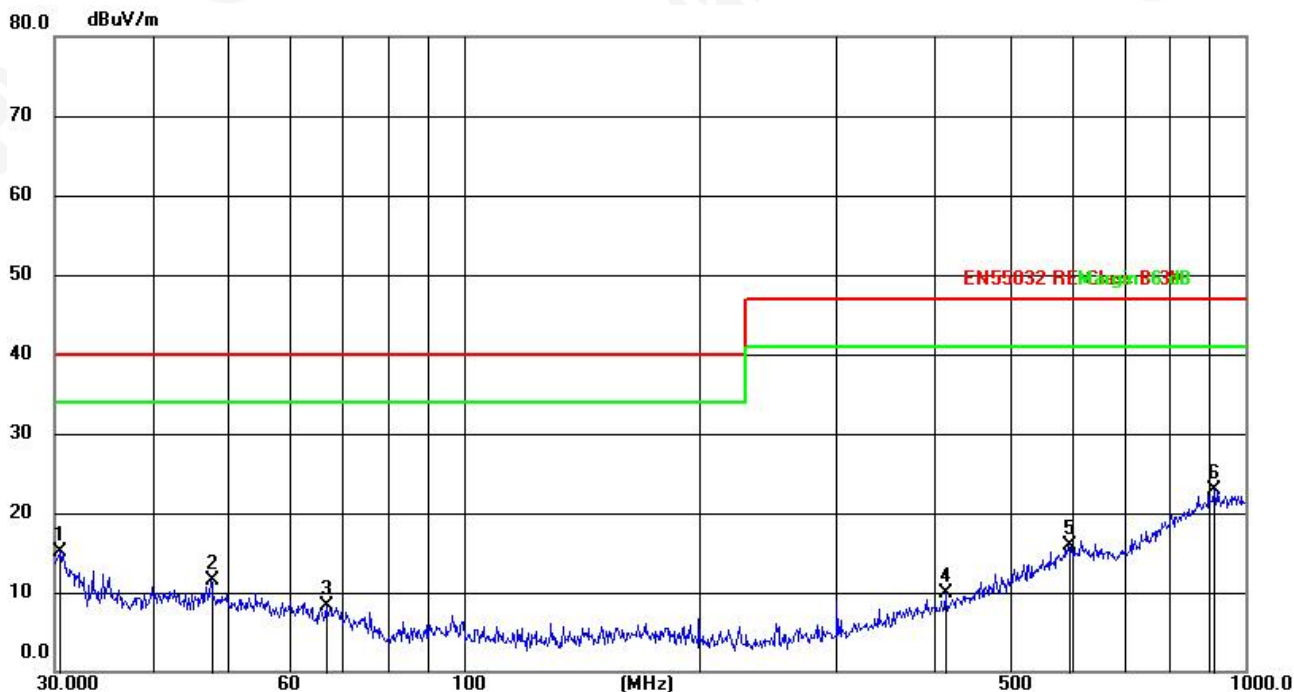

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4238	34.73	-19.55	15.18	40.00	-24.82	QP
2	47.4918	29.90	-18.46	11.44	40.00	-28.56	QP
3	66.7325	28.74	-20.41	8.33	40.00	-31.67	QP
4	413.2706	29.33	-19.43	9.90	47.00	-37.10	QP
5	593.0497	29.39	-13.43	15.96	47.00	-31.04	QP
6	912.8620	30.02	-7.14	22.88	47.00	-24.12	QP


Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.



5.2.7. TEST RESULTS(1000-6000MHz)

Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Power :	DC 3.7V	Test Mode :	Mode 1

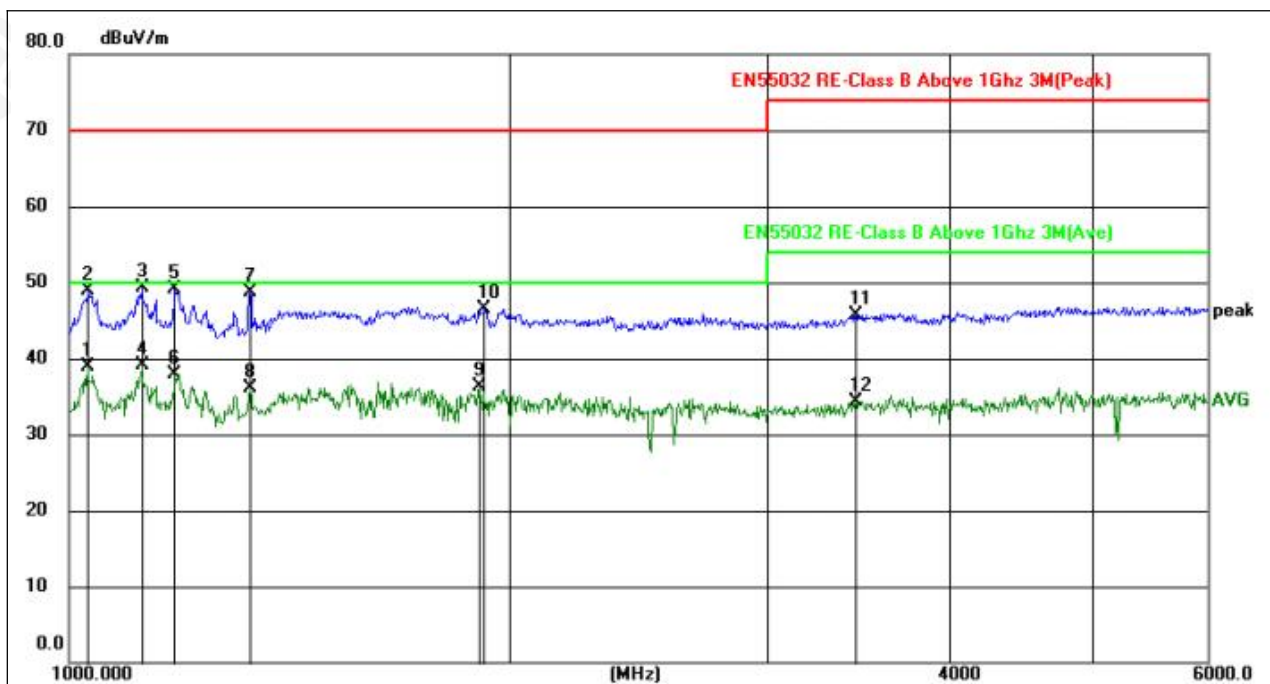


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1029.083	40.20	-1.22	38.98	50.00	-11.02	AVG				
2	1030.928	50.10	-1.23	48.87	70.00	-21.13	peak				
3	1121.506	50.87	-1.61	49.26	70.00	-20.74	peak				
4	1121.506	40.69	-1.61	39.08	50.00	-10.92	AVG				
5	1181.321	50.88	-1.86	49.02	70.00	-20.98	peak				
6	1181.321	39.78	-1.86	37.92	50.00	-12.08	AVG				
7	1329.615	51.24	-2.51	48.73	70.00	-21.27	peak				
8	1329.615	38.60	-2.51	36.09	50.00	-13.91	AVG				
9	1906.051	41.36	-5.00	36.36	50.00	-13.64	AVG				
10	1923.203	51.52	-5.08	46.44	70.00	-23.56	peak				
11	3449.074	49.65	-3.89	45.76	74.00	-28.24	peak				
12	3449.074	38.27	-3.89	34.38	54.00	-19.62	AVG				

Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.



Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Power :	DC 3.7V	Test Mode :	Mode 1

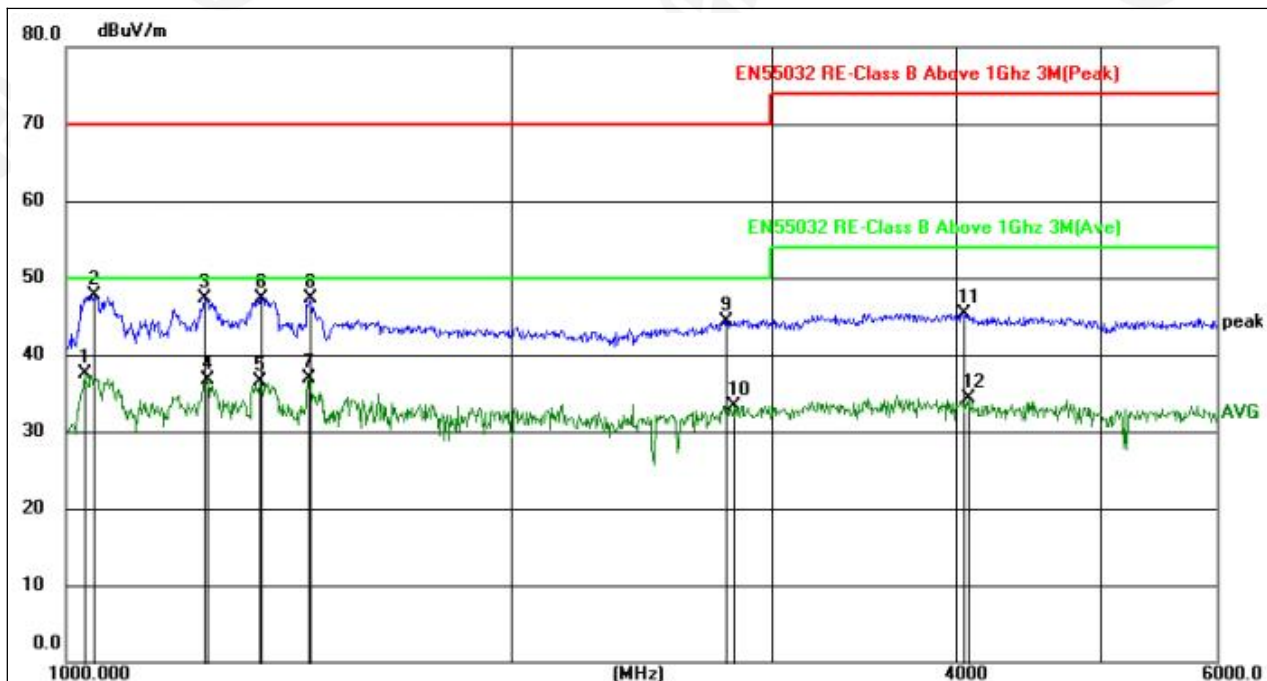

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1029.083	38.70	-1.22	37.48	50.00	-12.52	AVG				
2	1043.940	48.96	-1.27	47.69	70.00	-22.31	peak				
3	1242.099	49.52	-2.13	47.39	70.00	-22.61	peak				
4	1244.327	38.90	-2.15	36.75	50.00	-13.25	AVG				
5	1351.230	39.10	-2.60	36.50	50.00	-13.50	AVG				
6	1356.081	50.01	-2.63	47.38	70.00	-22.62	peak				
7	1459.452	40.00	-3.07	36.93	50.00	-13.07	AVG				
8	1462.070	50.46	-3.09	47.37	70.00	-22.63	peak				
9	2791.777	48.67	-4.31	44.36	70.00	-25.64	peak				
10	2832.082	37.59	-4.25	33.34	50.00	-16.66	AVG				
11	4038.126	48.93	-3.70	45.23	74.00	-28.77	peak				
12	4074.465	37.90	-3.69	34.21	54.00	-19.79	AVG				

Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.



5.3. LIMITS OF HARMONICS CURRENT

IEC 555-2					
Table - I			Table - II		
Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)
Non Portable Tools or TV Receivers	Odd Harmonics		TV Receivers	Odd Harmonics	
	3	2.30		3	0.80
	5	1.14		5	0.60
	7	0.77		7	0.45
	9	0.40		9	0.30
	11	0.33		11	0.17
	13	0.21		13	0.12
	15≤n≤39	0.15 · 15/n		15≤n≤39	0.10 · 15/n
	Even Harmonics			Even Harmonics	
	2	1.08		2	0.30
	4	0.43		4	0.15
	8	0.30			
8≤n≤40	0.23 · 8/n	DC	0.05		

EN 61000-3-2/IEC 61000-3-2					
Equipment Category	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in A) (mA/w)	
Class A	Same as Limits Specified in 4-2.1, Table - I, but only odd harmonics required	Class D	3	2.30	3.4
			5	1.14	1.9
			7	0.77	1.0
			9	0.40	0.5
			11	0.33	0.35
			$13 \leq n \leq 39$	see Table I	$3.85/n$
			only odd harmonics required		




5.3.1. TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to section 5 of EN 61000-3-2: 2000. The EUT is classified as follows:
Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.
Class C: Lighting equipment.
Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.
- For the actual test configuration, please refer to the related item –EUT Test Photos.

5.3.2. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.3. TEST SETUP

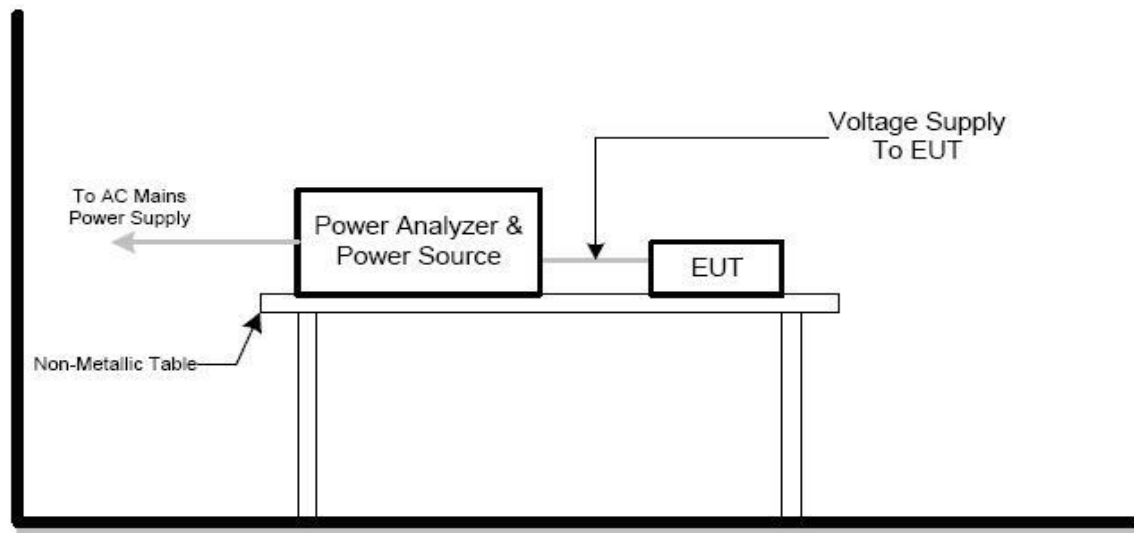

5.3.4. TEST RESULTS

Note: The active input power of the EUT is less than 75W. No limits apply for equipment with an active input power up to and including 75W



5.4. VOLTAGE FLUCTUATION AND FLICKERS

5.4.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS

Tests	Limits		Descriptions
	IEC555-3	IEC/EN 61000-3-3	
Pst	≤ 1.0 , Tp= 10 min.	≤ 1.0 , Tp= 10 min.	Short Term Flicker Indicator
Plt	N/A	≤ 0.65 , Tp=2 hr.	Long Term Flicker Indicator
dc	$\leq 3\%$	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	$\leq 4\%$	Maximum Relative V-change
d (t)	N/A	$\leq 3.3\%$ for > 500 ms	Relative V-change characteristic

5.4.2 TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Clause 5.0 of IEC555-2 and/or Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

b. Fluctuation and Flickers Test:

Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 5.0/6.0 of IEC555-3 and/or Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.


c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.4.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4.4 TEST SETUP

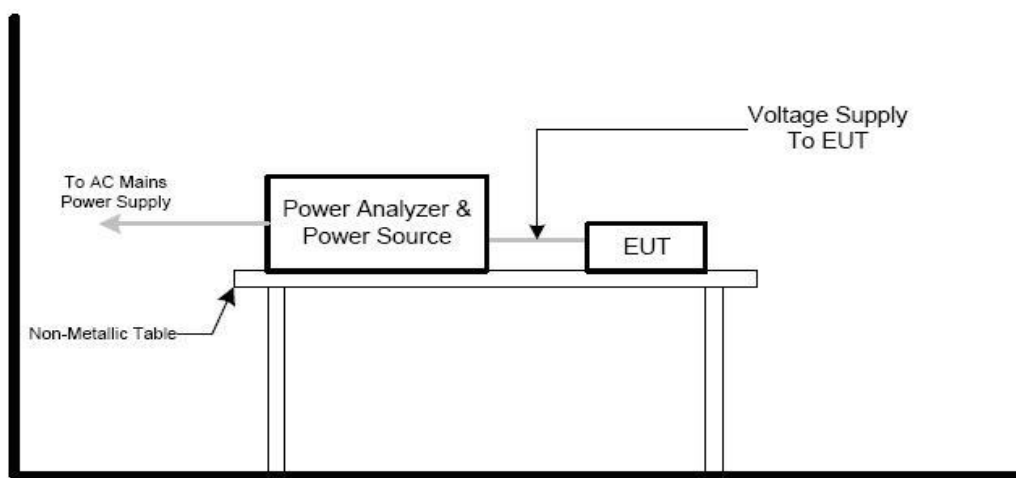

5.4.5 TEST RESULTS



N/A

Only AC products need to test this item, DC products are not applicable.

6. EMC IMMUNITY TEST**6.1. GENERAL PERFORMANCE CRITERIA****PERFORMANCE CRITERIA**According To **EN 301489-17** standard, The General Performance Criteria As Following:

Criteria	During the test	After the test
A	Shall operate as intended May show degradation of performance (see note 1) Shall be no loss of function Shall be no unintentional transmissions	Shall operate as intended Shall be no degradation of performance (see note 2) Shall be no loss of function Shall be no loss of stored data or user programmable functions
B	May show loss of function (one or more) May show degradation of performance (see note 1) No unintentional transmissions	Functions shall be self-recoverable Shall operate as intended after recovering Shall be no degradation of performance (see note 2) Shall be no loss of stored data or user programmable functions
C	May be loss of function (one or more)	Functions shall be recoverable by the operator Shall operate as intended after recovering Shall be no degradation of performance (see note 2)

NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: no degradation of performance after the test is understood as any degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.



PERFORMANCE FOR TT

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR TR

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CT

The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an Acknowledgement (ACK) or Not Acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CR

The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

6.2. GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.



7. ESD TESTING

7.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Required Performance	B
Discharge Voltage:	Air Discharge : 2kV/4kV/8kV (Direct) Contact Discharge : 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode:	AC Discharge
Discharge Period:	1 second minimum


7.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT.
During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.
If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.
Vertical Coupling Plane (VCP):
The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
Horizontal Coupling Plane (HCP):
The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
- b. Air discharges at insulation surfaces of the EUT.
It was at least ten single discharges with positive and negative at the same selected point.
- c. For the actual test configuration, please refer to the related Item –EUT Test Photos.



7.3 TEST SETUP

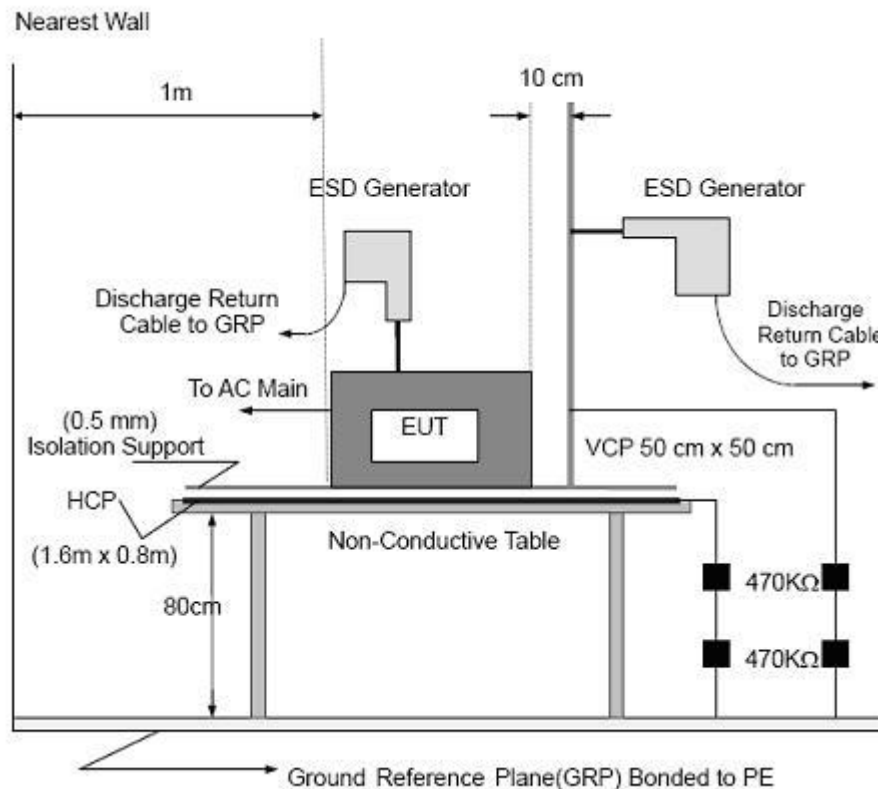

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



7.4 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	DC 3.7V
Test Mode	Mode 1		

Mode	Air Discharge								Contact Discharge								Obser vation	Criterion	Result
Test level (kV)	2		4		8		10		2		4		6		8				
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-			
HCP									A	A	A	A					TT,TR	B	PASS
VCP									A	A	A	A							PASS
USB port									A	A	A	A							PASS
enclosure	A	A	A	A	A	A													PASS
slot	A	A	A	A	A	A													PASS
Button	A	A	A	A	A	A													PASS

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:
Direct / Indirect (HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at each point. Air discharges: Minimum 10 times (Positive/Negative) at each point.
- 3) N/A - denotes test is not applicable in this test report
- 4) There was not any unintentional transmission in standby mode



8. RS TESTING

8.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-3
Required Performance	A
Frequency Range:	80 MHz - 6000 MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	0.8 m
Dwell Time:	at least 3 seconds

8.2 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.


The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:

- The field strength level was 3V/m.
- The frequency range is swept from 80 MHz to 6000 MHz, & 1400MHz - 2700MHz with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- Sweep Frequency 900 MHz, with the Duty Cycle:1/8 and Modulation: Pulse 217 Hz(if applicable)
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.



8.3 TEST SETUP

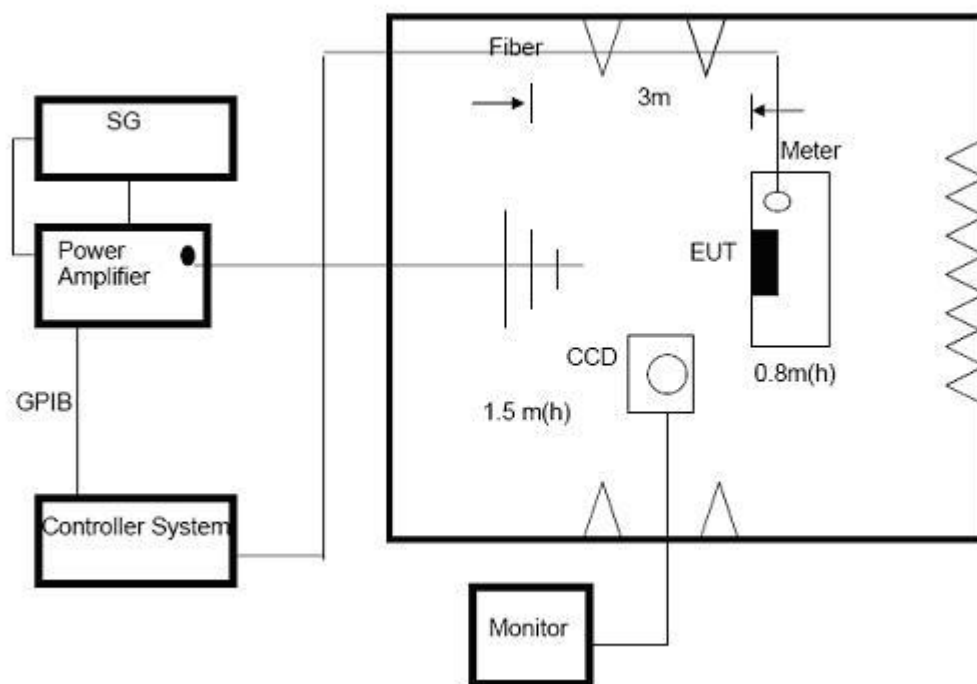

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



8.4 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	DC 3.7V
Test Mode	Mode 1		

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results	Judgment
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	A	PASS
			Rear				
			Left				
			Right				

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report.
- 3) There was no change operated with initial operating during the test.
- 4) There was not any unintentional transmission in standby mode

The EUT is the testing item(s) was (were) fulfilled by subcontracted lab
SHENZHEN HAIYUN TESTING CO.,LTD



9. EFT/BURST TESTING

9.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-4
Required Performance	B
Test Voltage:	Power Line : 1 kV Signal/Control Line : 0.5 KV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave shape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.

9.2 TEST PROCEDURE



The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute
- For the actual test configuration, please refer to the related Item –EUT Test Photos.



9.3 TEST SETUP

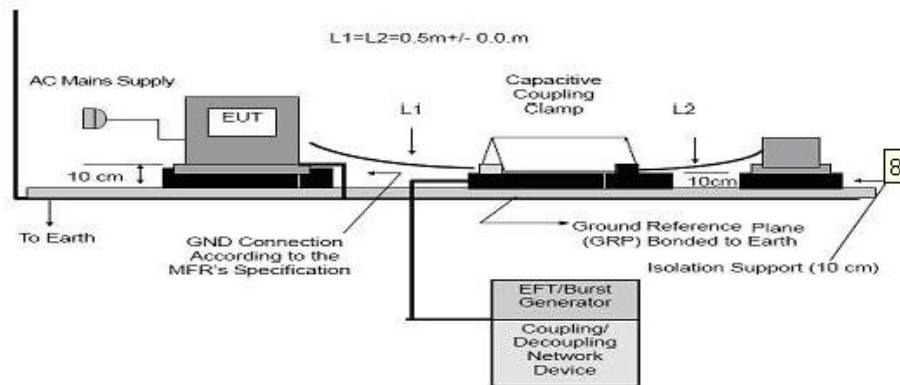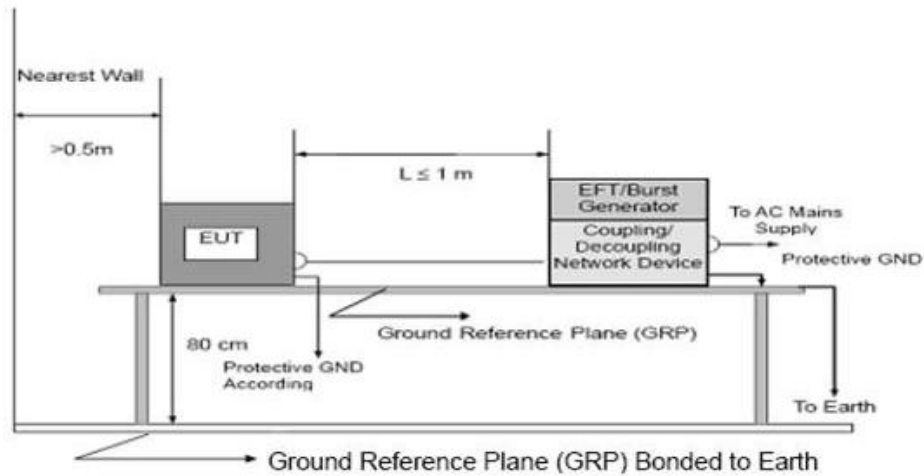

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

9.4 TEST RESULTS

N/A

Only AC products need to test this item, DC products are not applicable.



10. SURGE TESTING

10.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-5
Required Performance	B
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage:	Power Line : 0.5 kV, 1 kV, 2 kV
Surge Input/Output:	L1-L2,L1-PE,L2-PE
Generator Source:	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0 /90/180/270
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

10.2 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT:

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

d. For the actual test configuration, please refer to the related Item –EUT Test Photos.



10.3 TEST SETUP

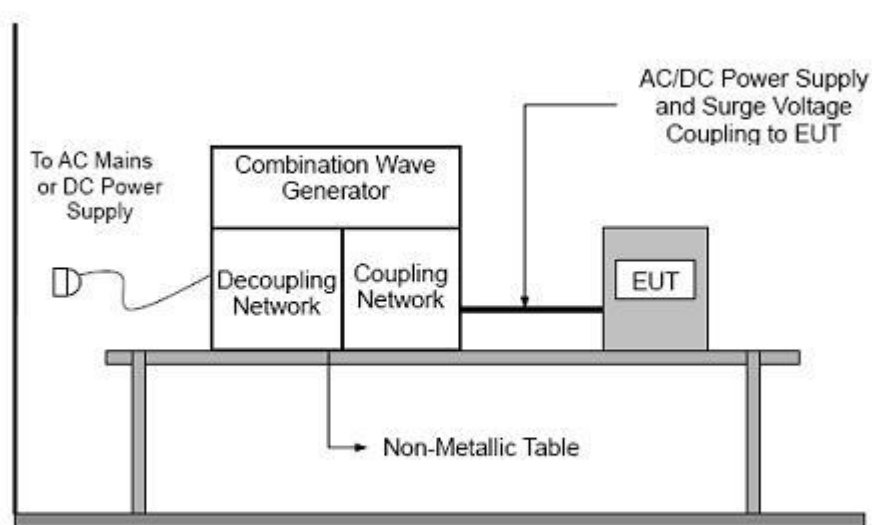

10.4 TEST RESULTS

N/A

Only AC products need to test this item, DC products are not applicable.



11. INJECTION CURRENT TESTING

11.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-6
Required Performance	A
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	3 Vr.m.s.
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Dwell Time:	at least 3 seconds

11.2 TEST PROCEDURE


The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- The field strength level was 3V.
- The frequency range is swept from 150 KHz to 80 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.



11.3 TEST SETUP

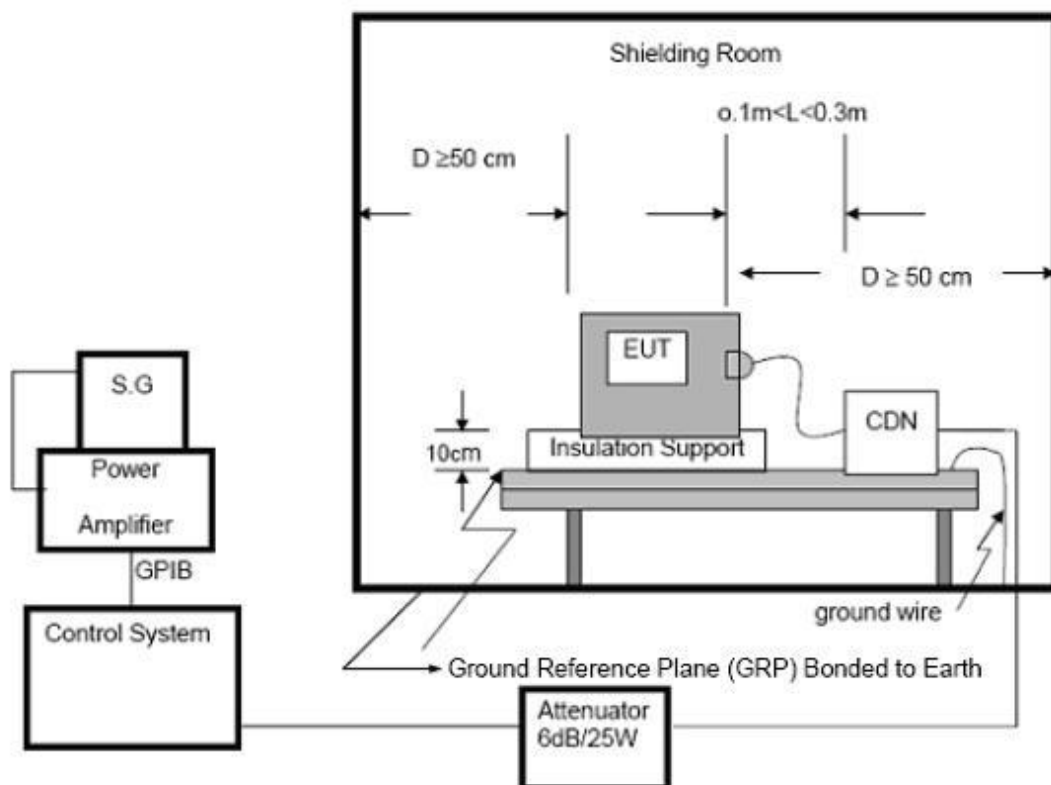

For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

11.4 TEST RESULTS

N/A

Only AC products need to test this item, DC products are not applicable.



12. VOLTAGE INTERRUPTION/DIPS TESTING


12.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-11
Required Performance	100% reduction, 0.5 Cycle
	100% reduction, 1.0 Cycle
	30% reduction, 25 Cycles
Voltage Interruptions:	100% reduction, 250 Cycles
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

12.2 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

12.3 TEST SETUP

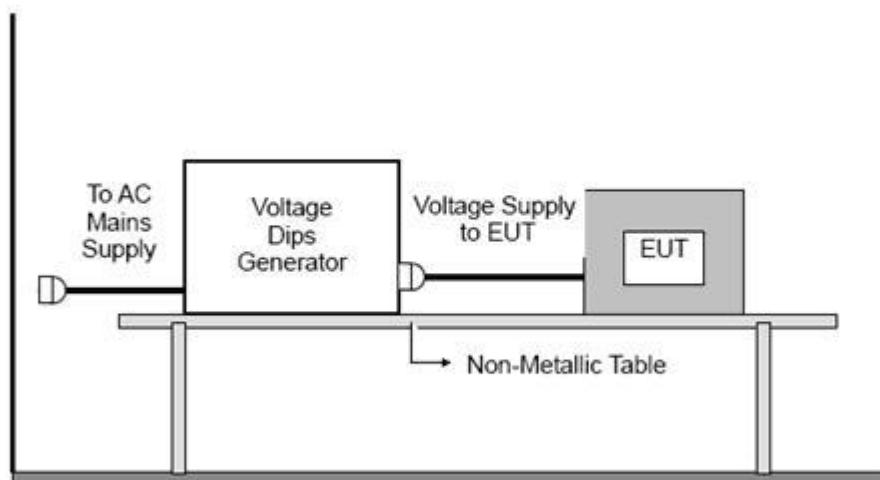

For the actual test configuration, please refer to the related Item –EUT Test Photos.

12.4 TEST RESULTS


N/A

Only AC products need to test this item, DC products are not applicable.



13. PHOTOS OF TEST SETUP

RE

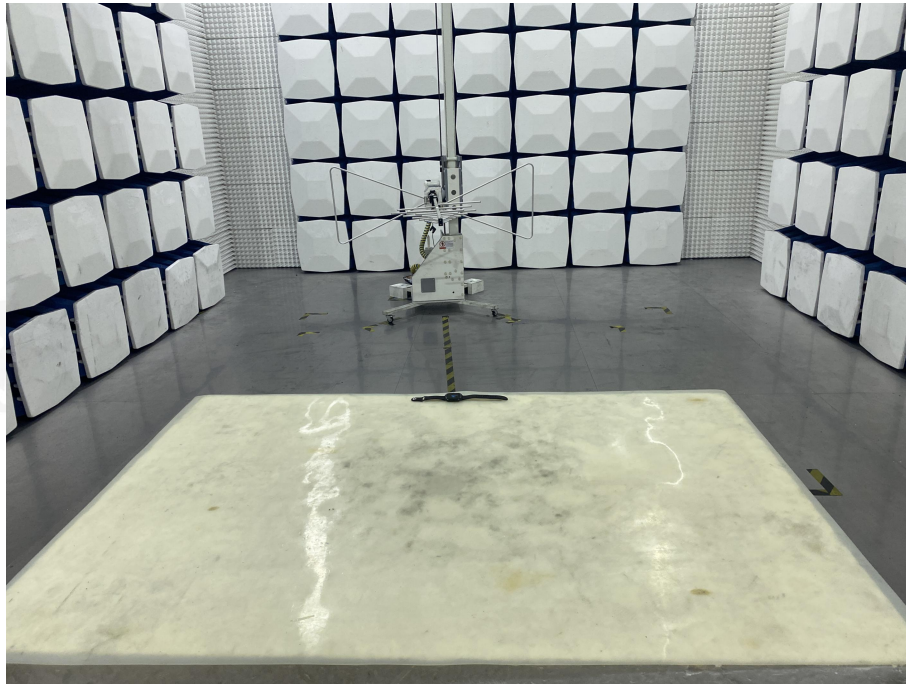



14. PHOTOS OF EUT



Photo 1



Photo 2

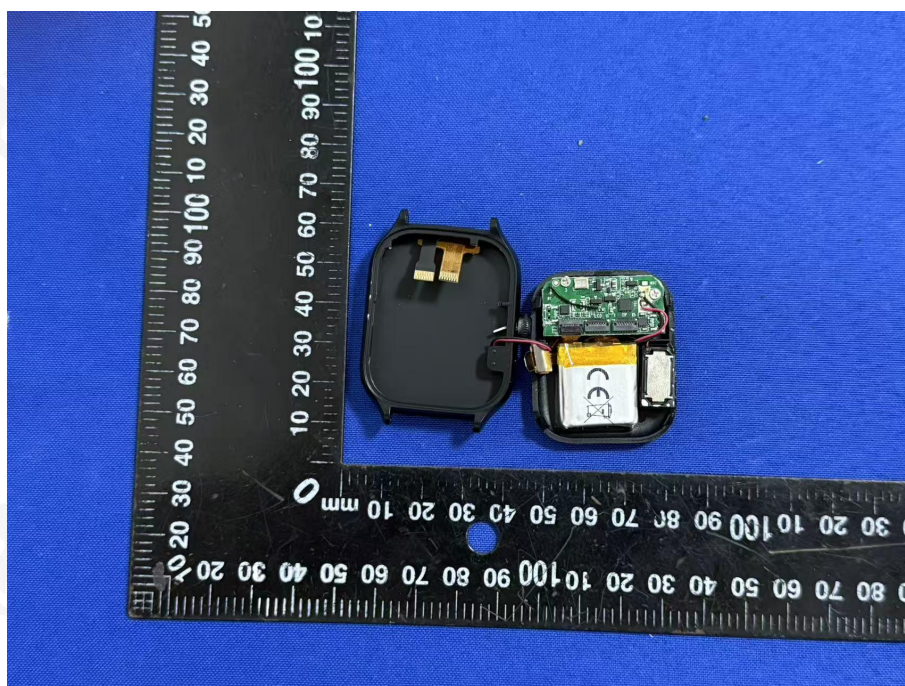


Photo 3

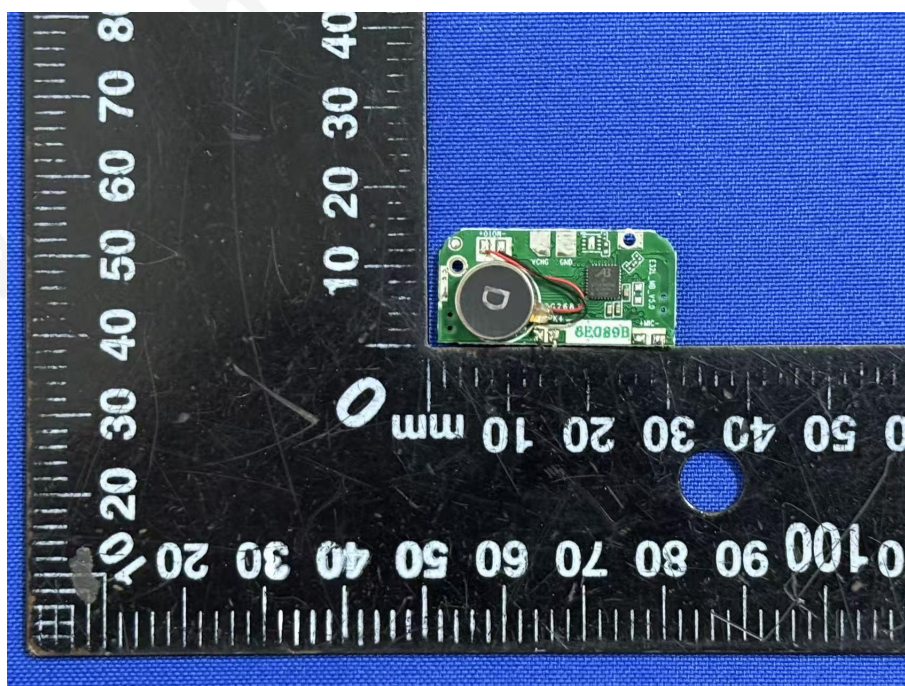


Photo 4

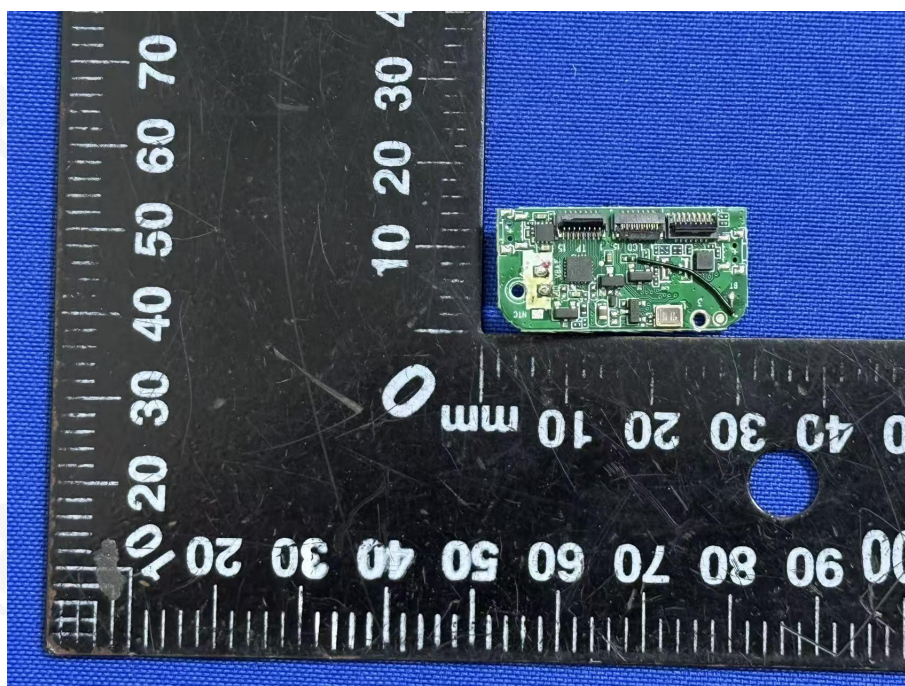


Photo 5

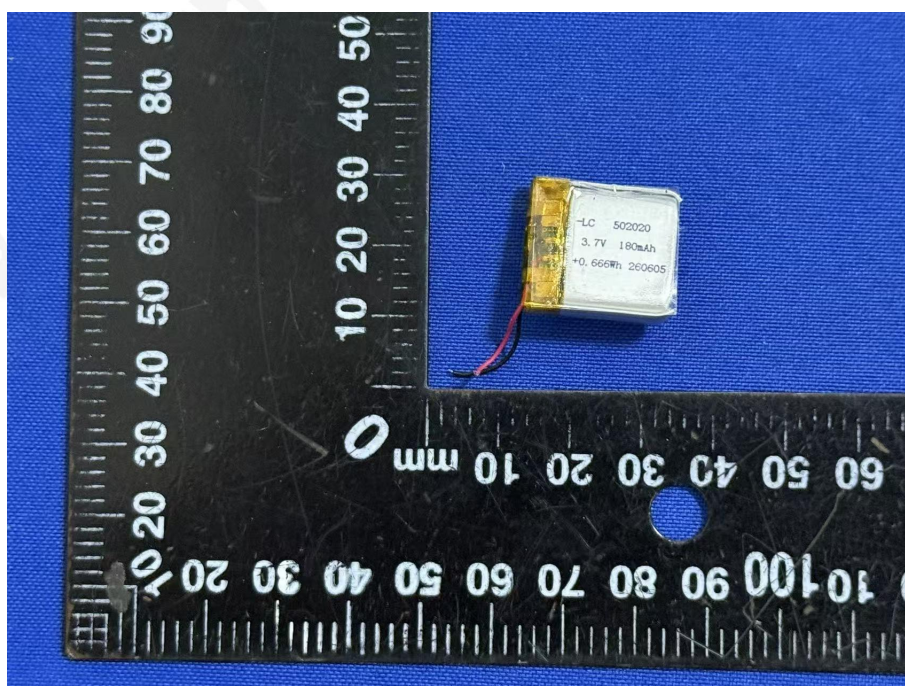


Photo 6

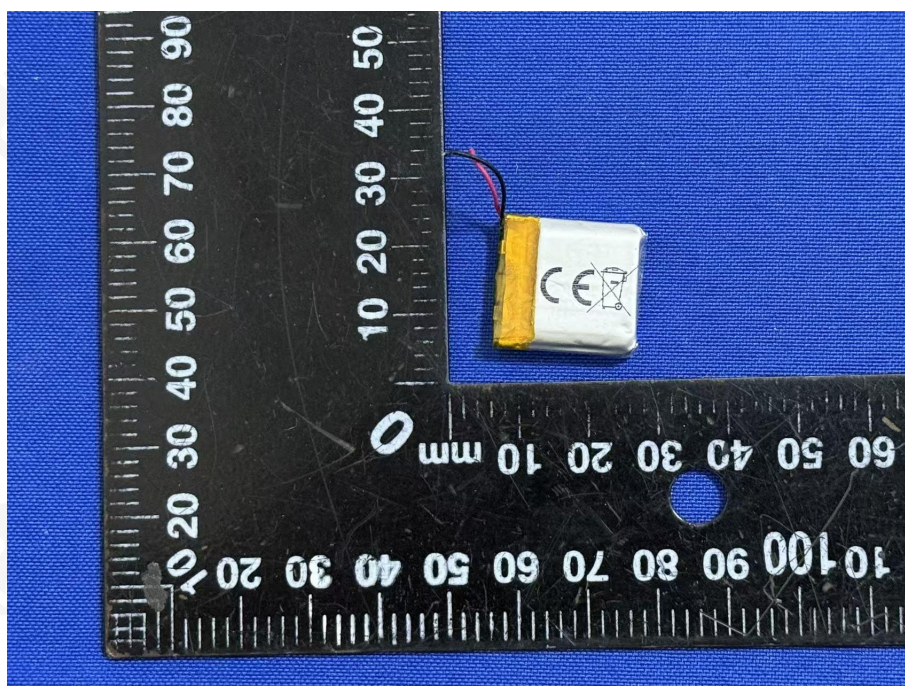


Photo 7

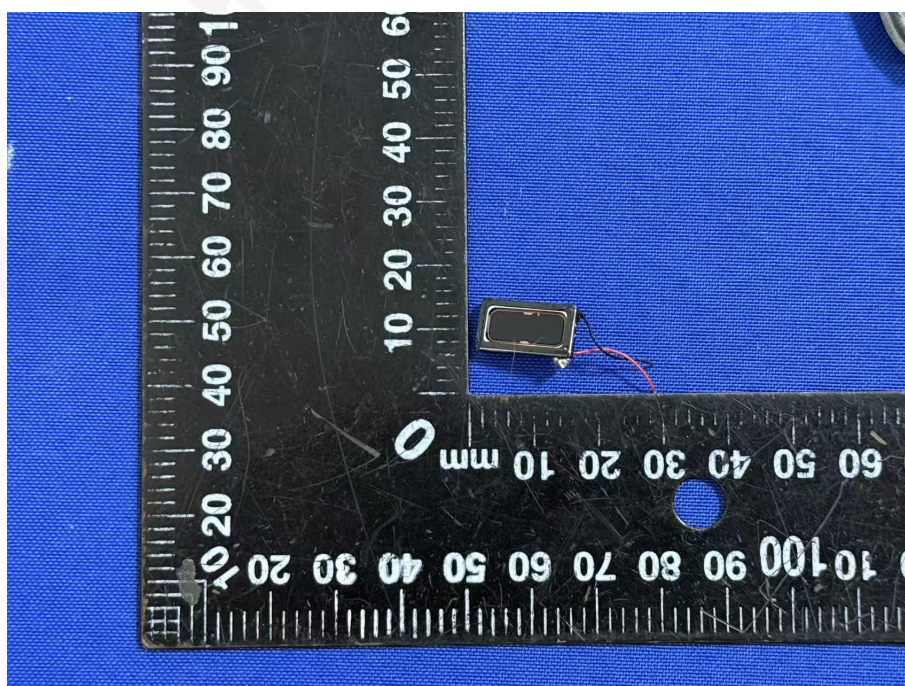


Photo 8

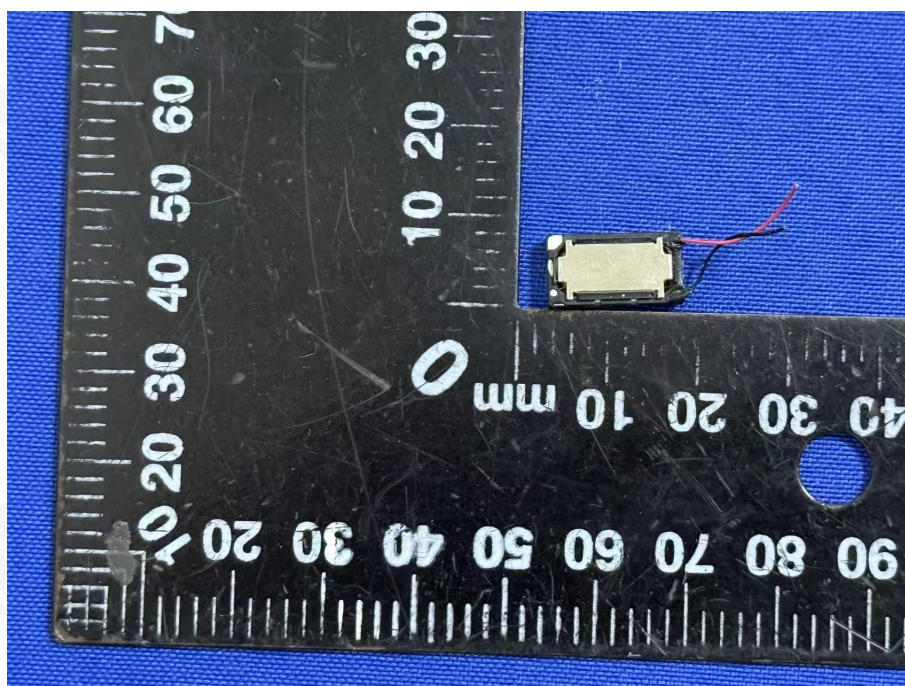


Photo 9

***** END OF REPORT *****